

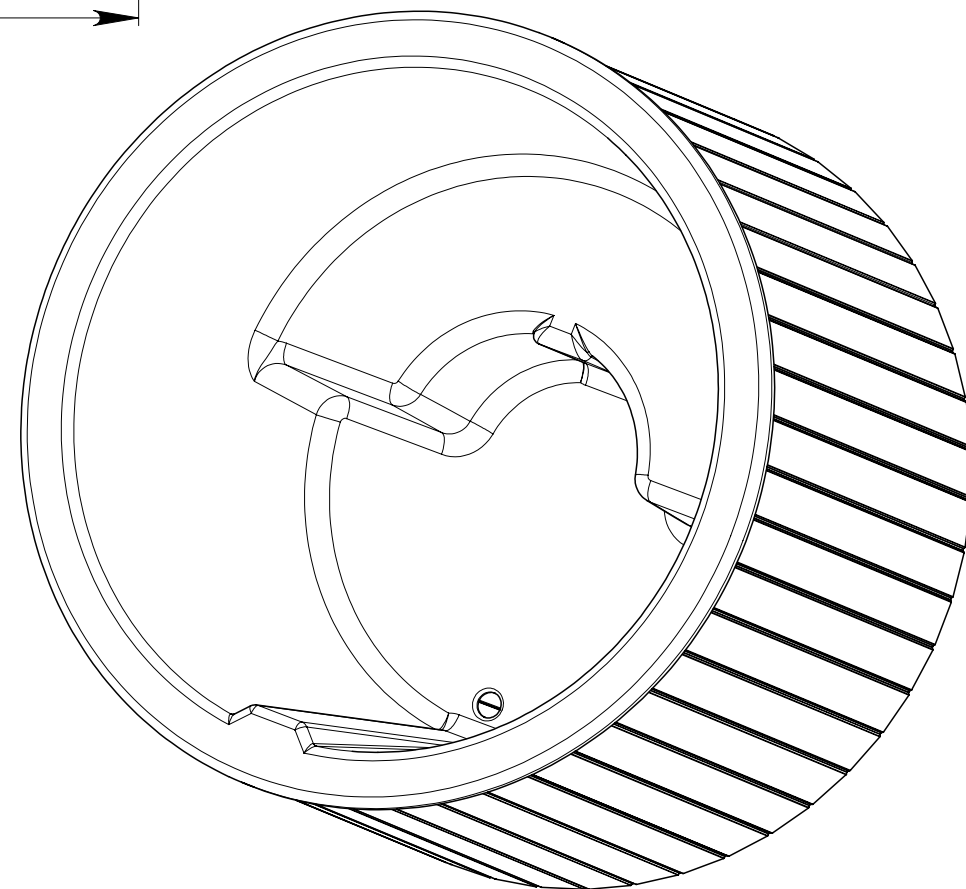
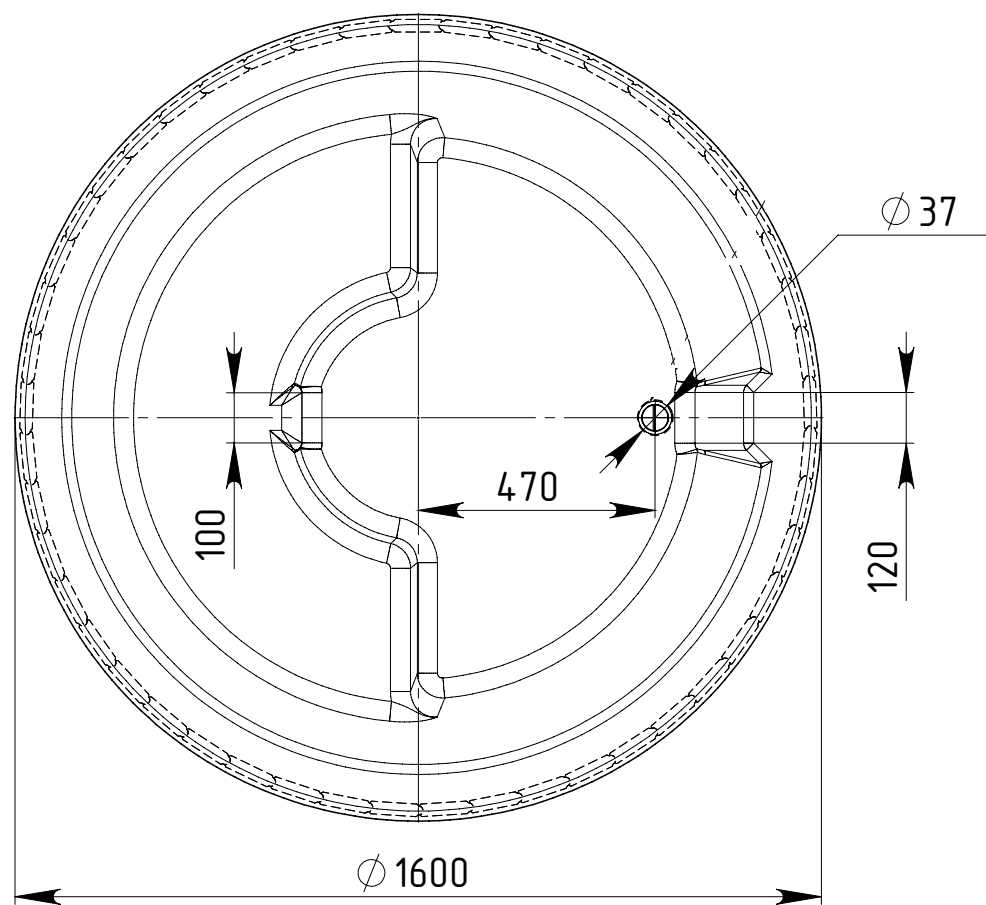


HOT TUB COMFORT 160

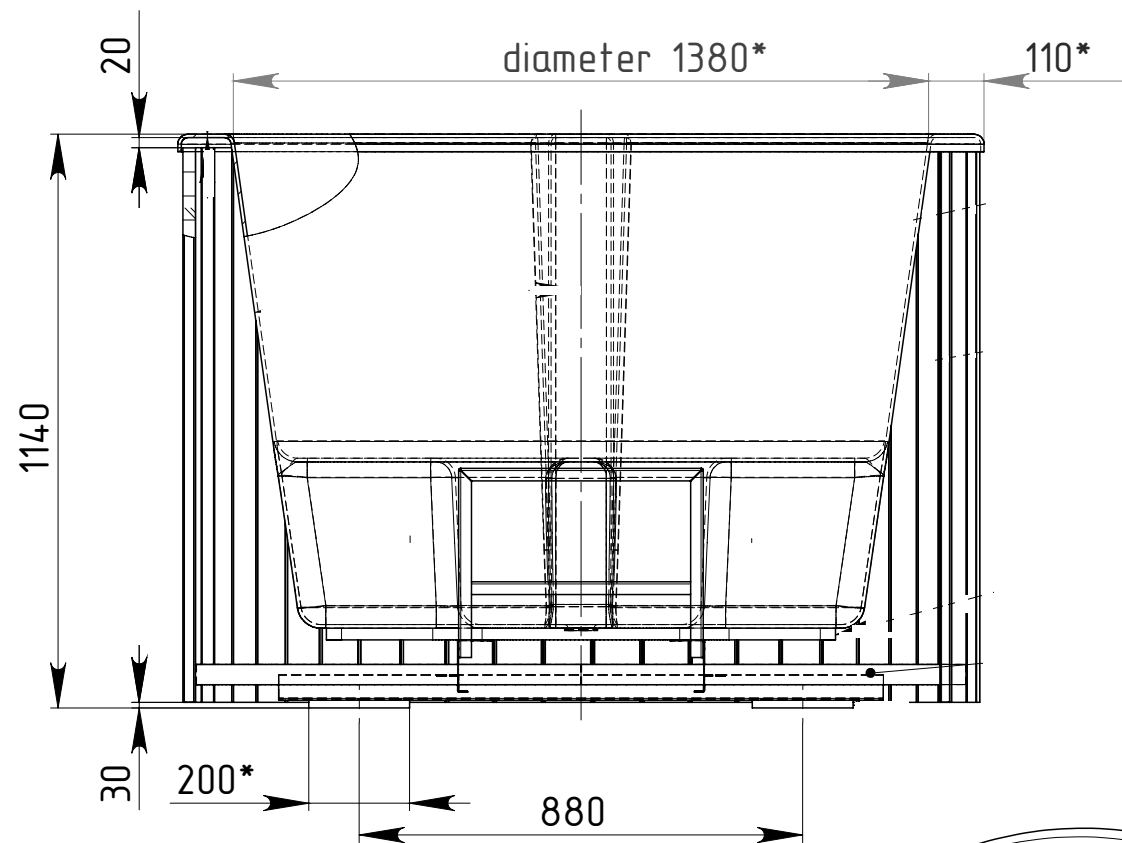

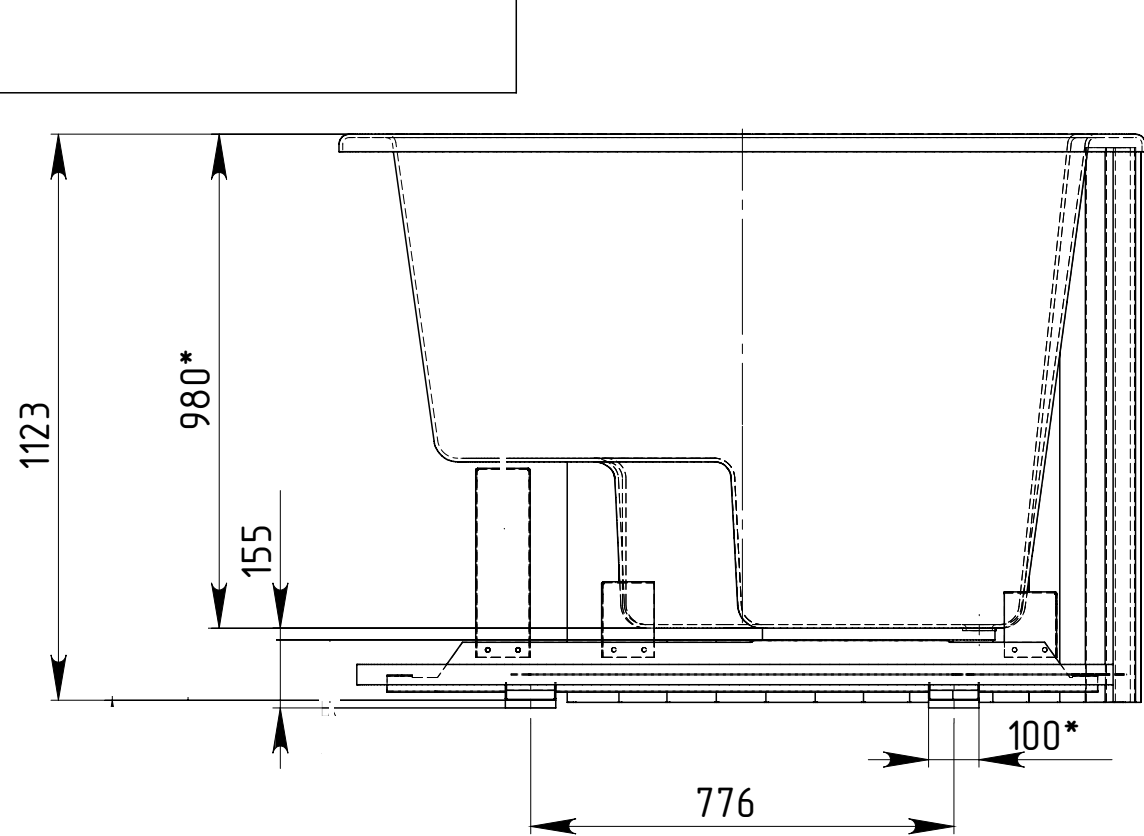

12. Thermowood cladding diameter 2175 mm.
3. The hot tub kit includes a 3-step staircase.
4. The hot tub can be equipped with a 40 kW stove, with chimney.

COMFORT 160




Tub

Scale

1:15



Sheets

Sheet 1

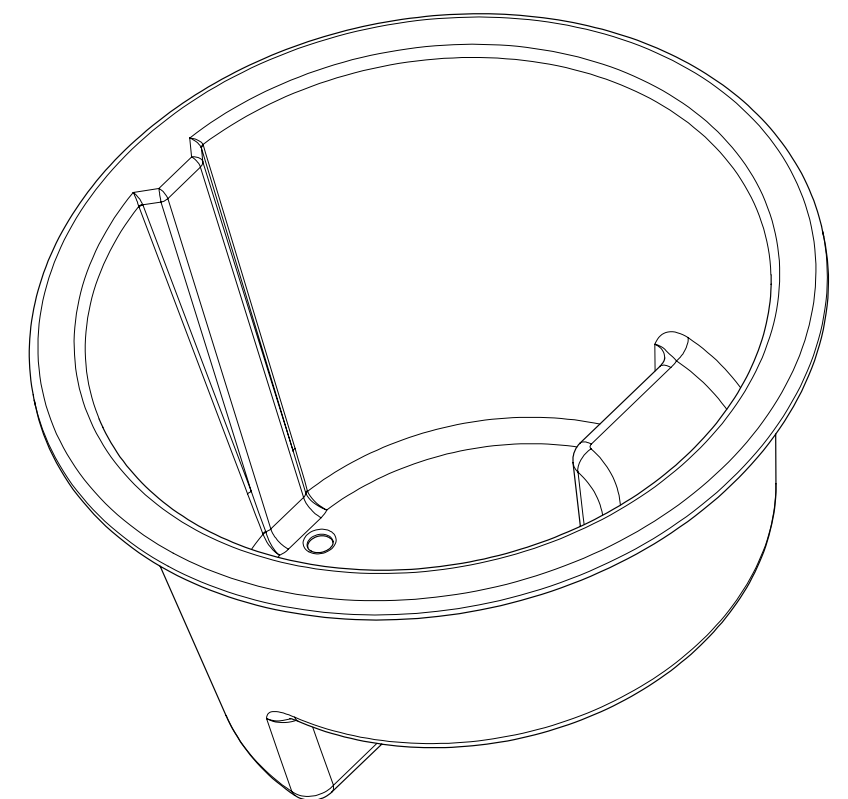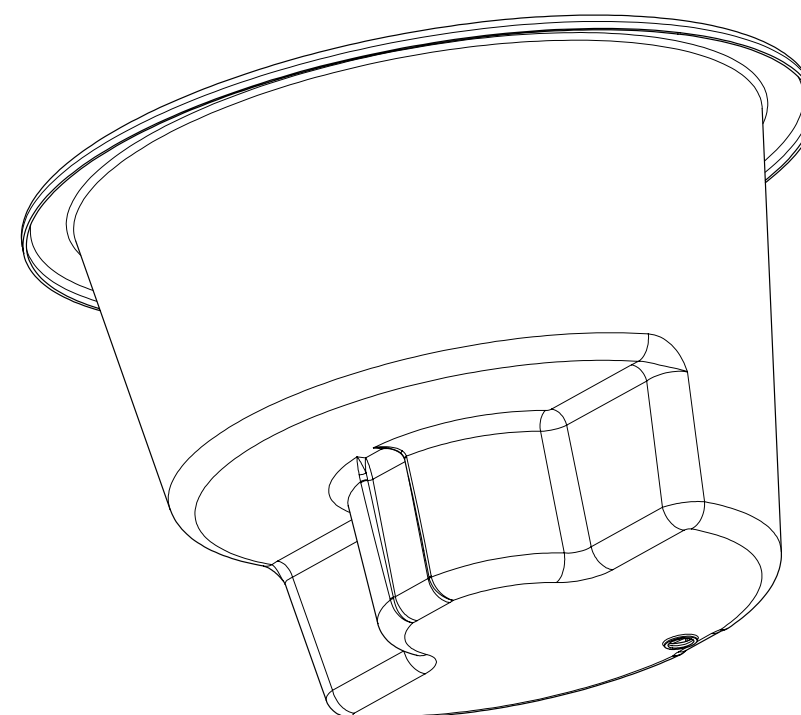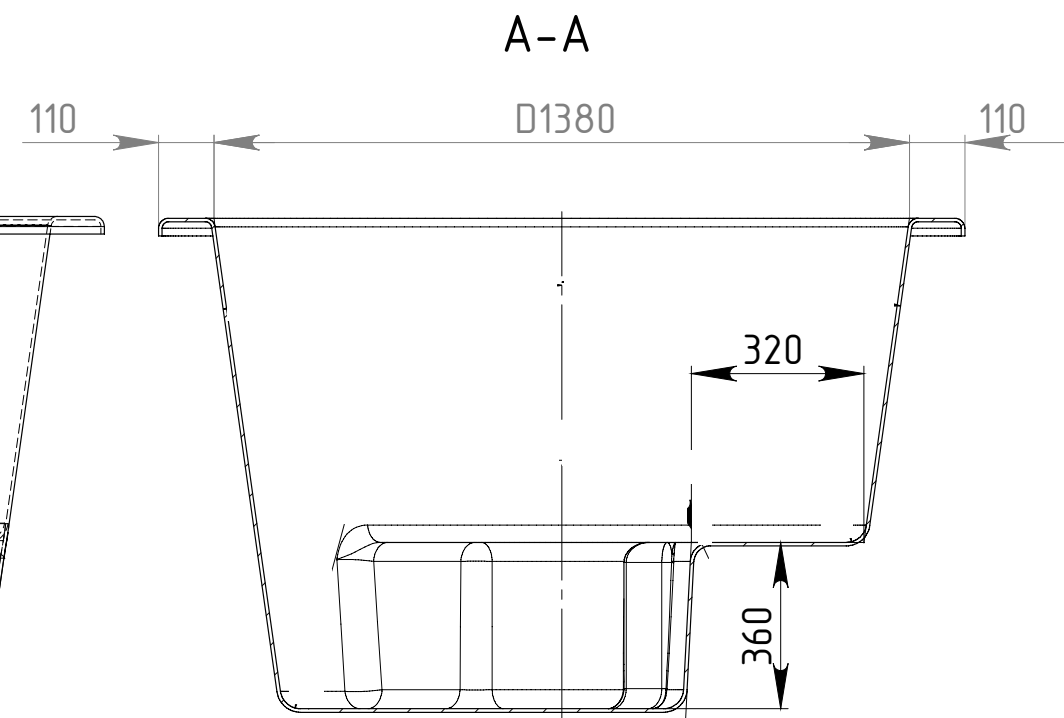


Format A3

METAL FRAME COMFORT 160

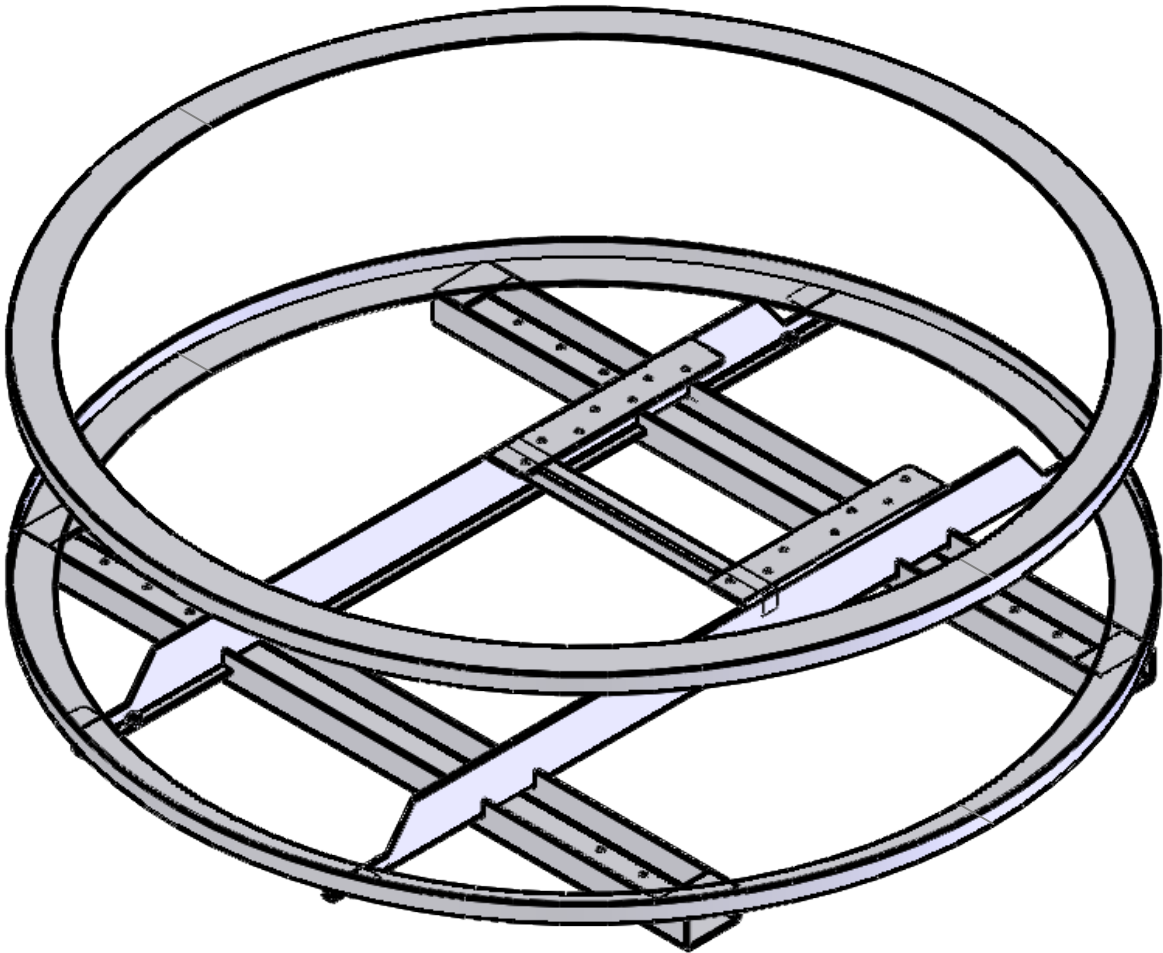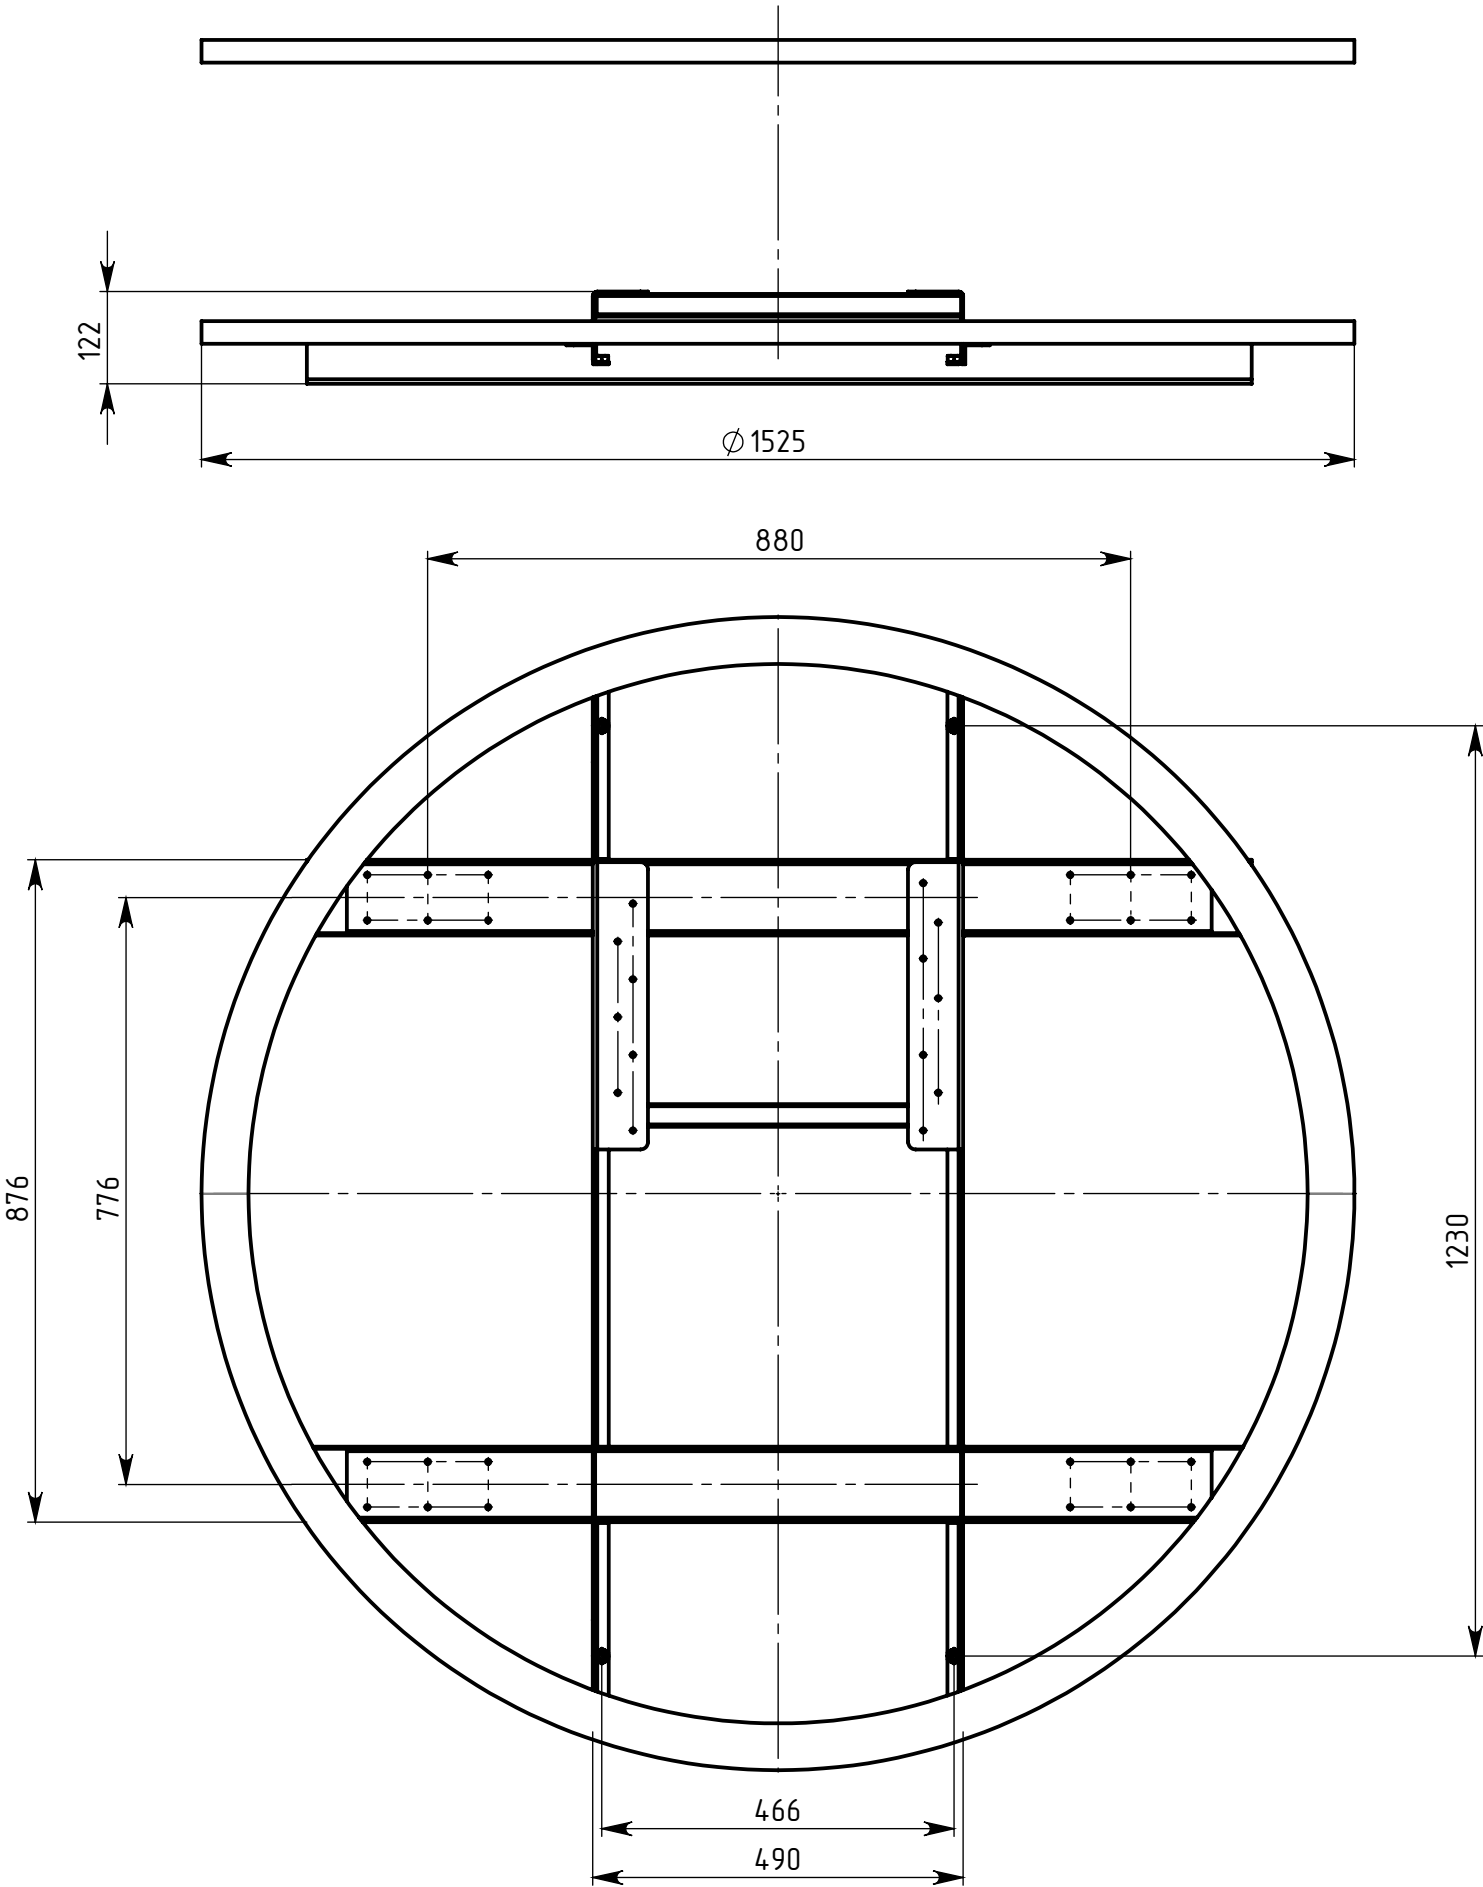

EXTERNAL STOVE 40 kW

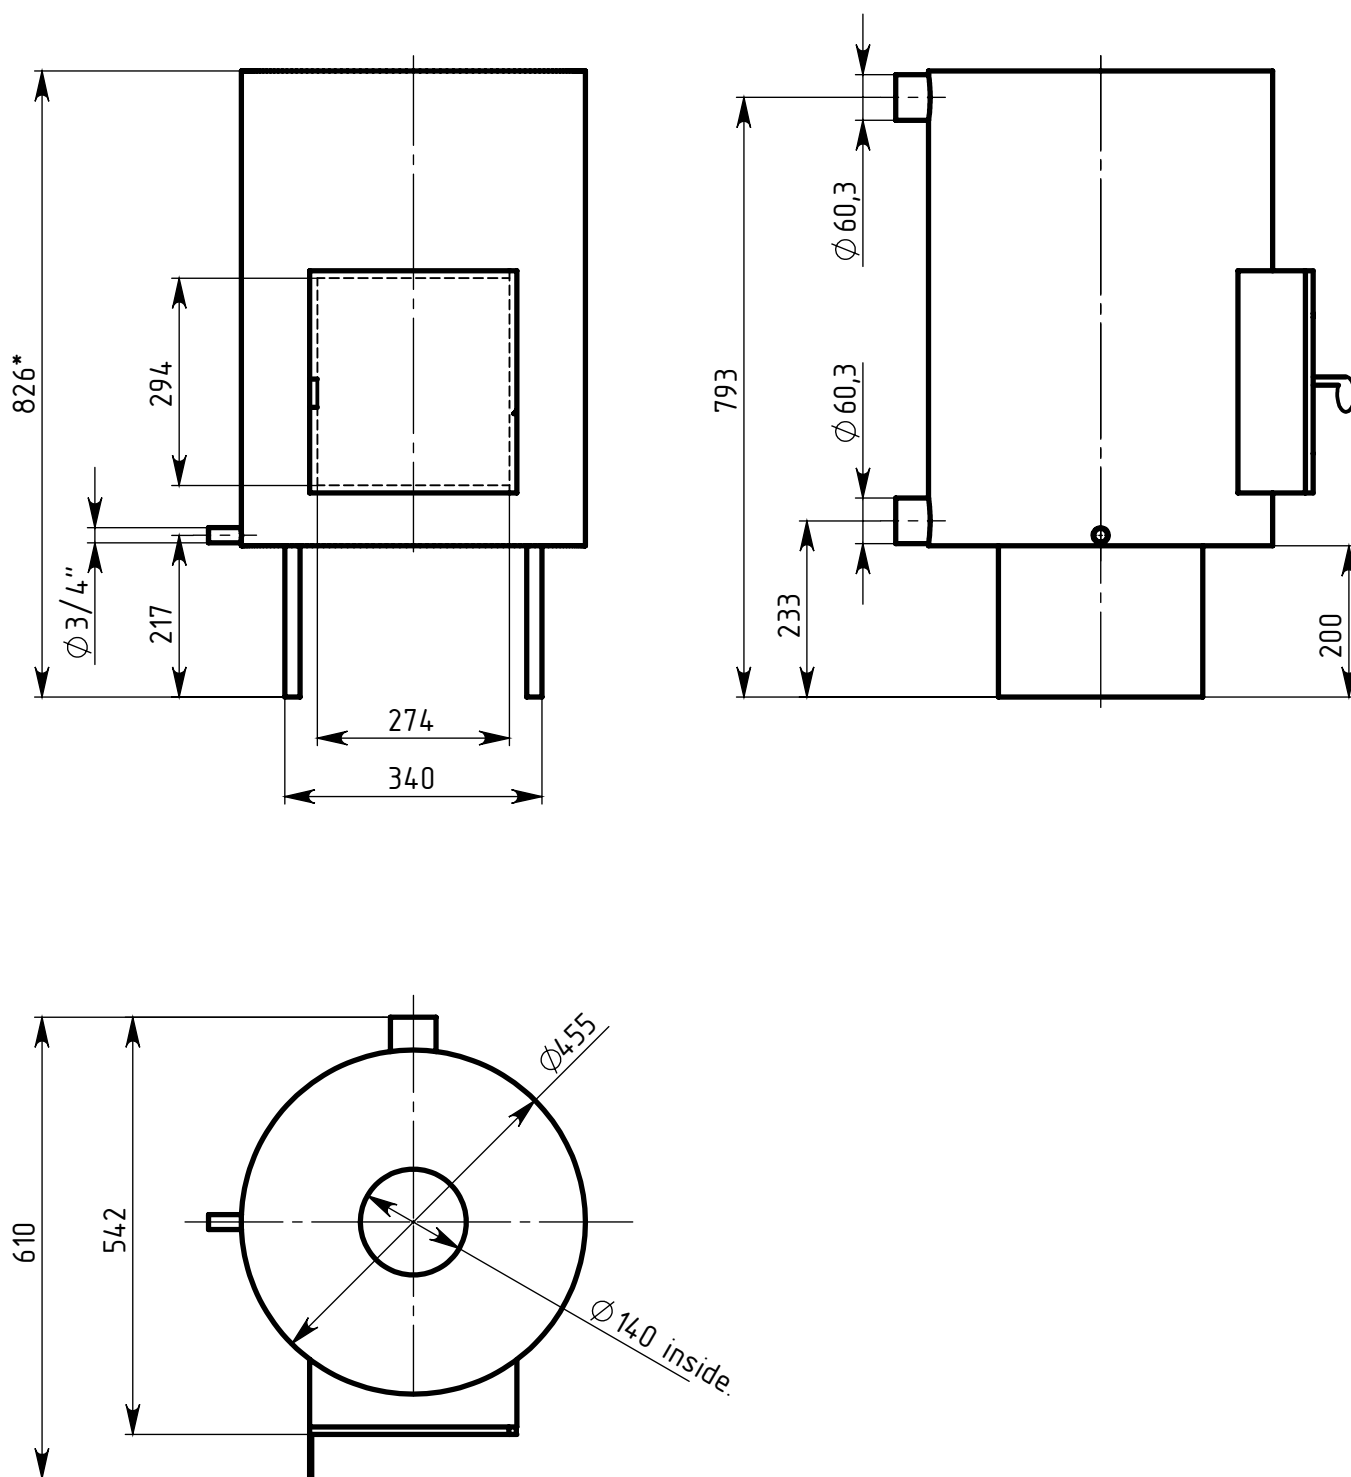

EXTERNAL STOVE 40 kW WITH CHIMNEY



Cap
200mm x 150mm

Chimney
140mm x 1000mm (2 pcs.)

Thermal protection
200mm x 1000mm

External stove diameter 455mm,
826mm


Total height of the chimney with
stove 2850 mm

Staircase for hot tub, thermo pine (light)



Width: 470 mm
Length: 540 mm
Height: 700 mm


Foundation plan for installing COMFORT 160 COLD (support surfaces)

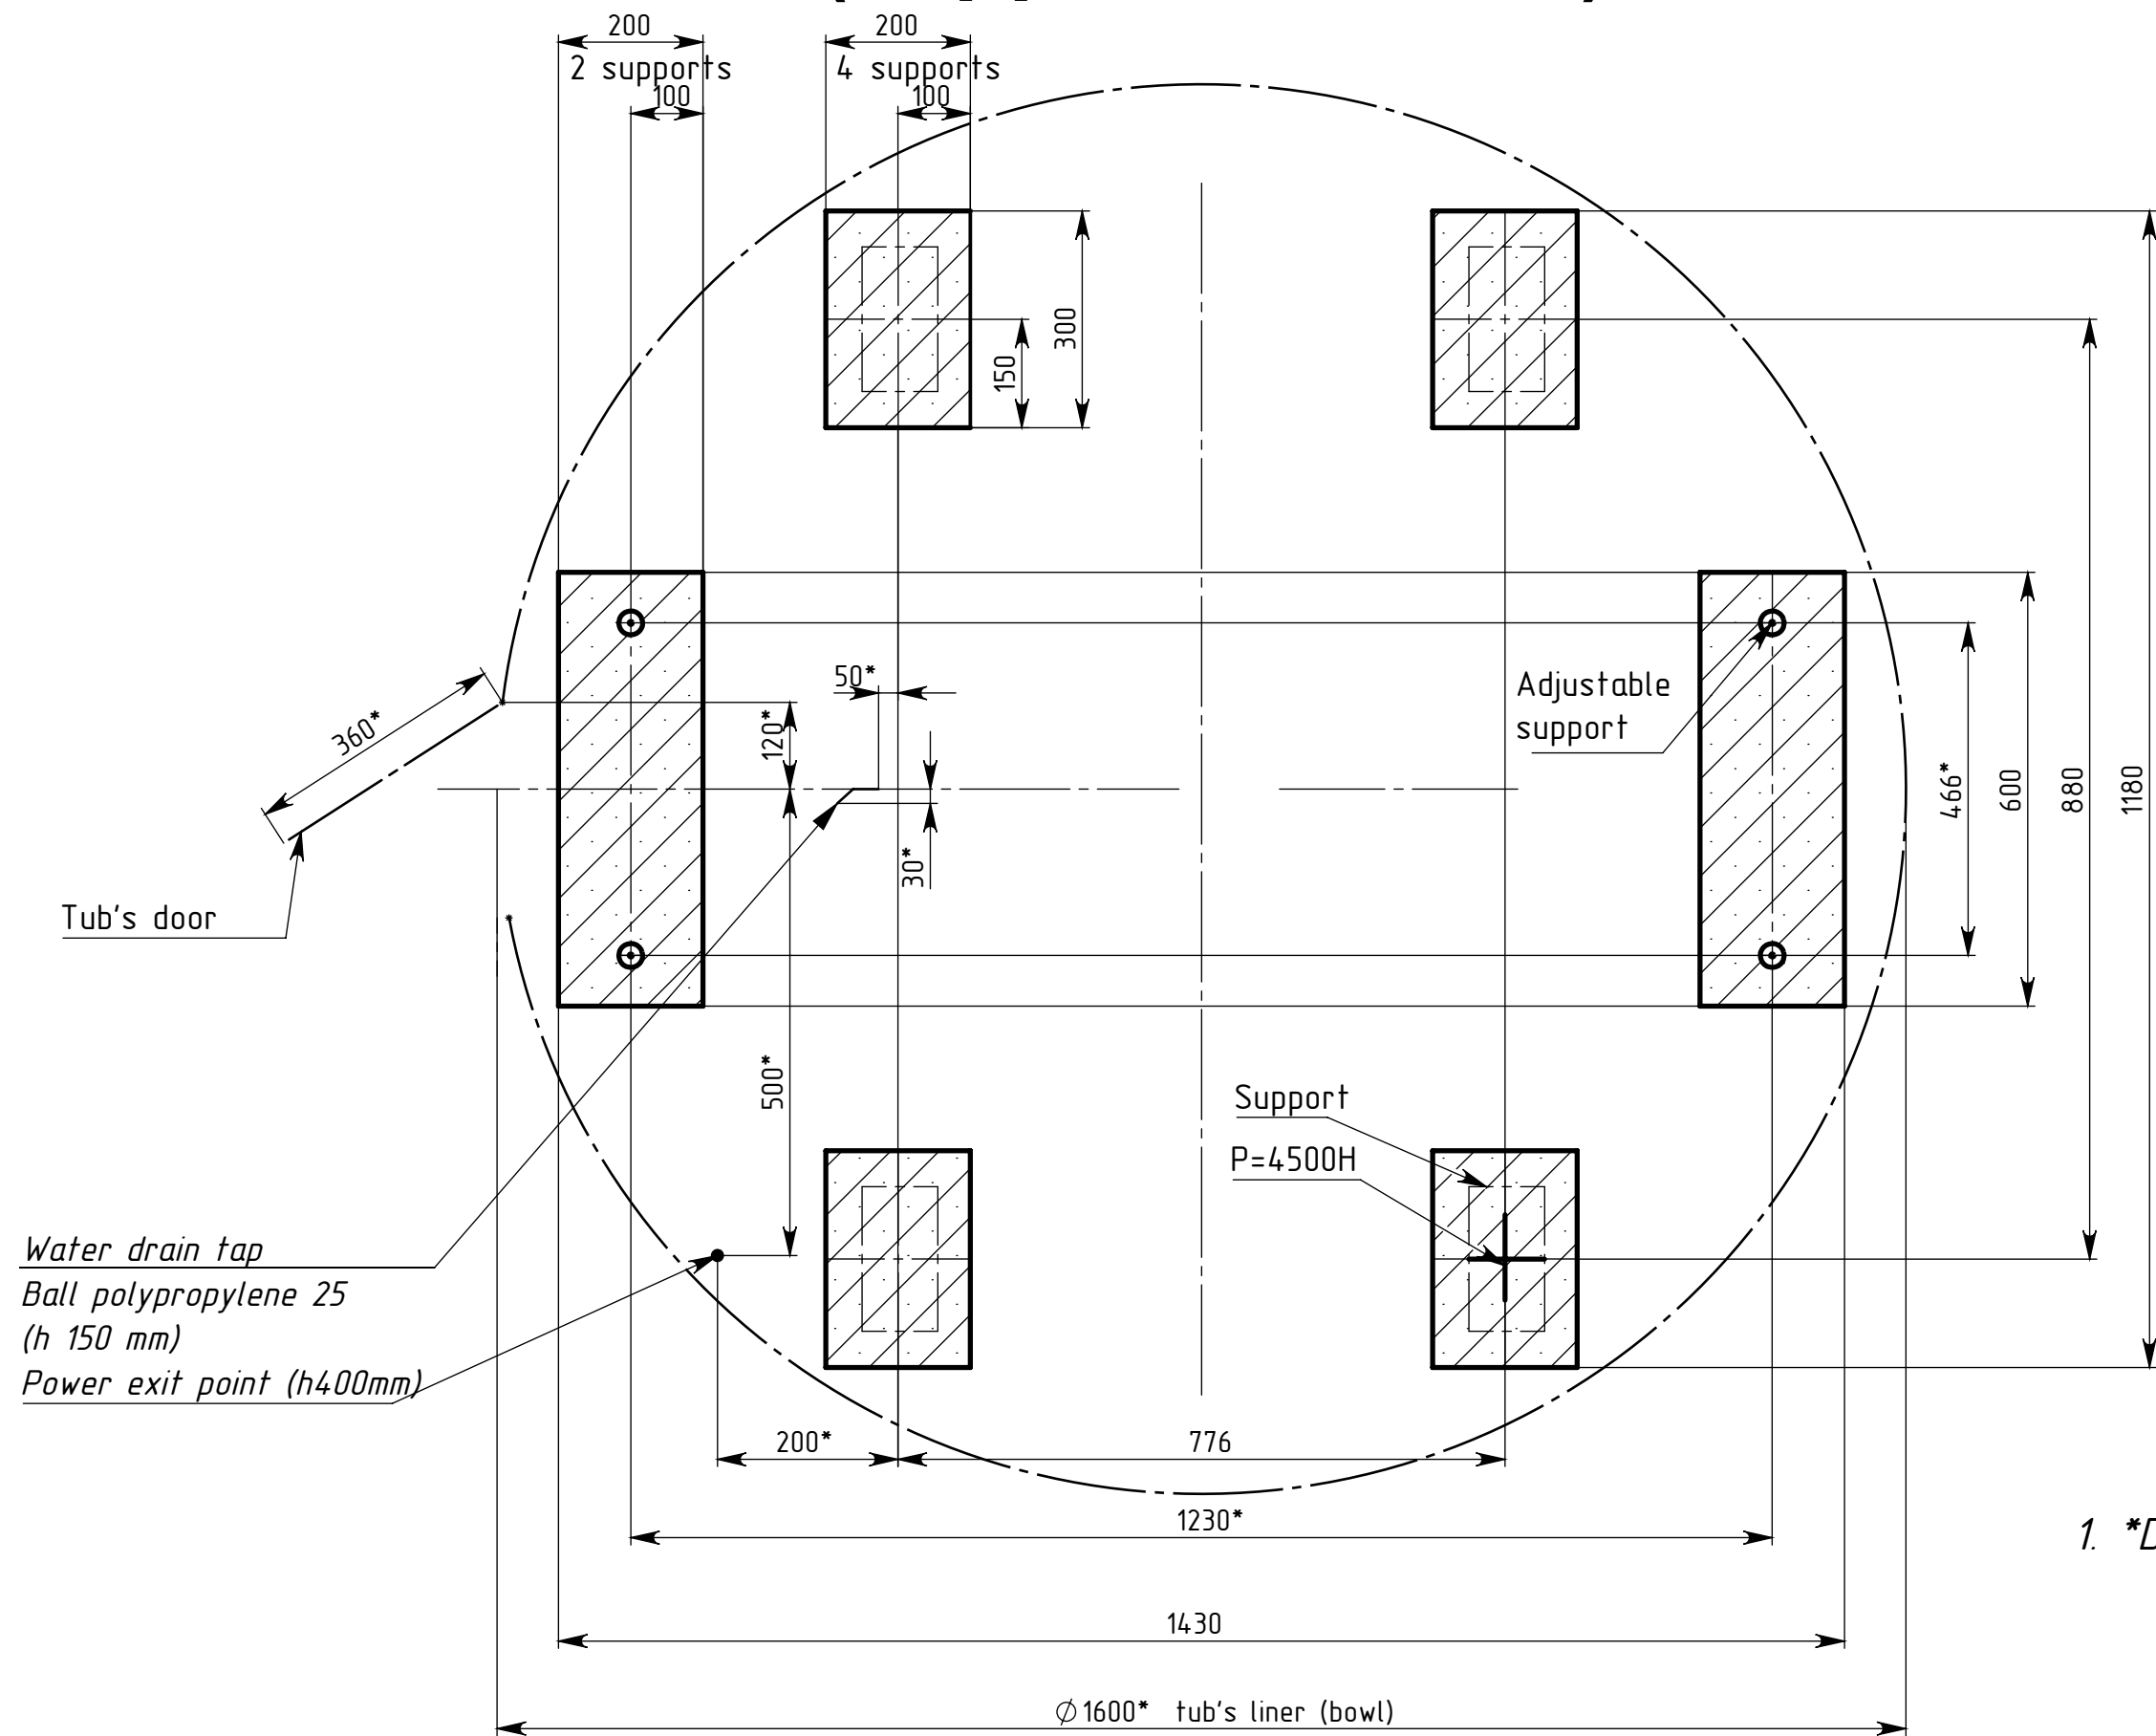

Support load	Weight, kg
Tub	170
Water	1000
People	400
General	1800
<i>For 1 support</i>	

1. *Dimensions for reference.

Foundation plan for installing COMFORT 160 HOT TUB WITH EXTERNAL STOVE 40 kW (support surfaces)

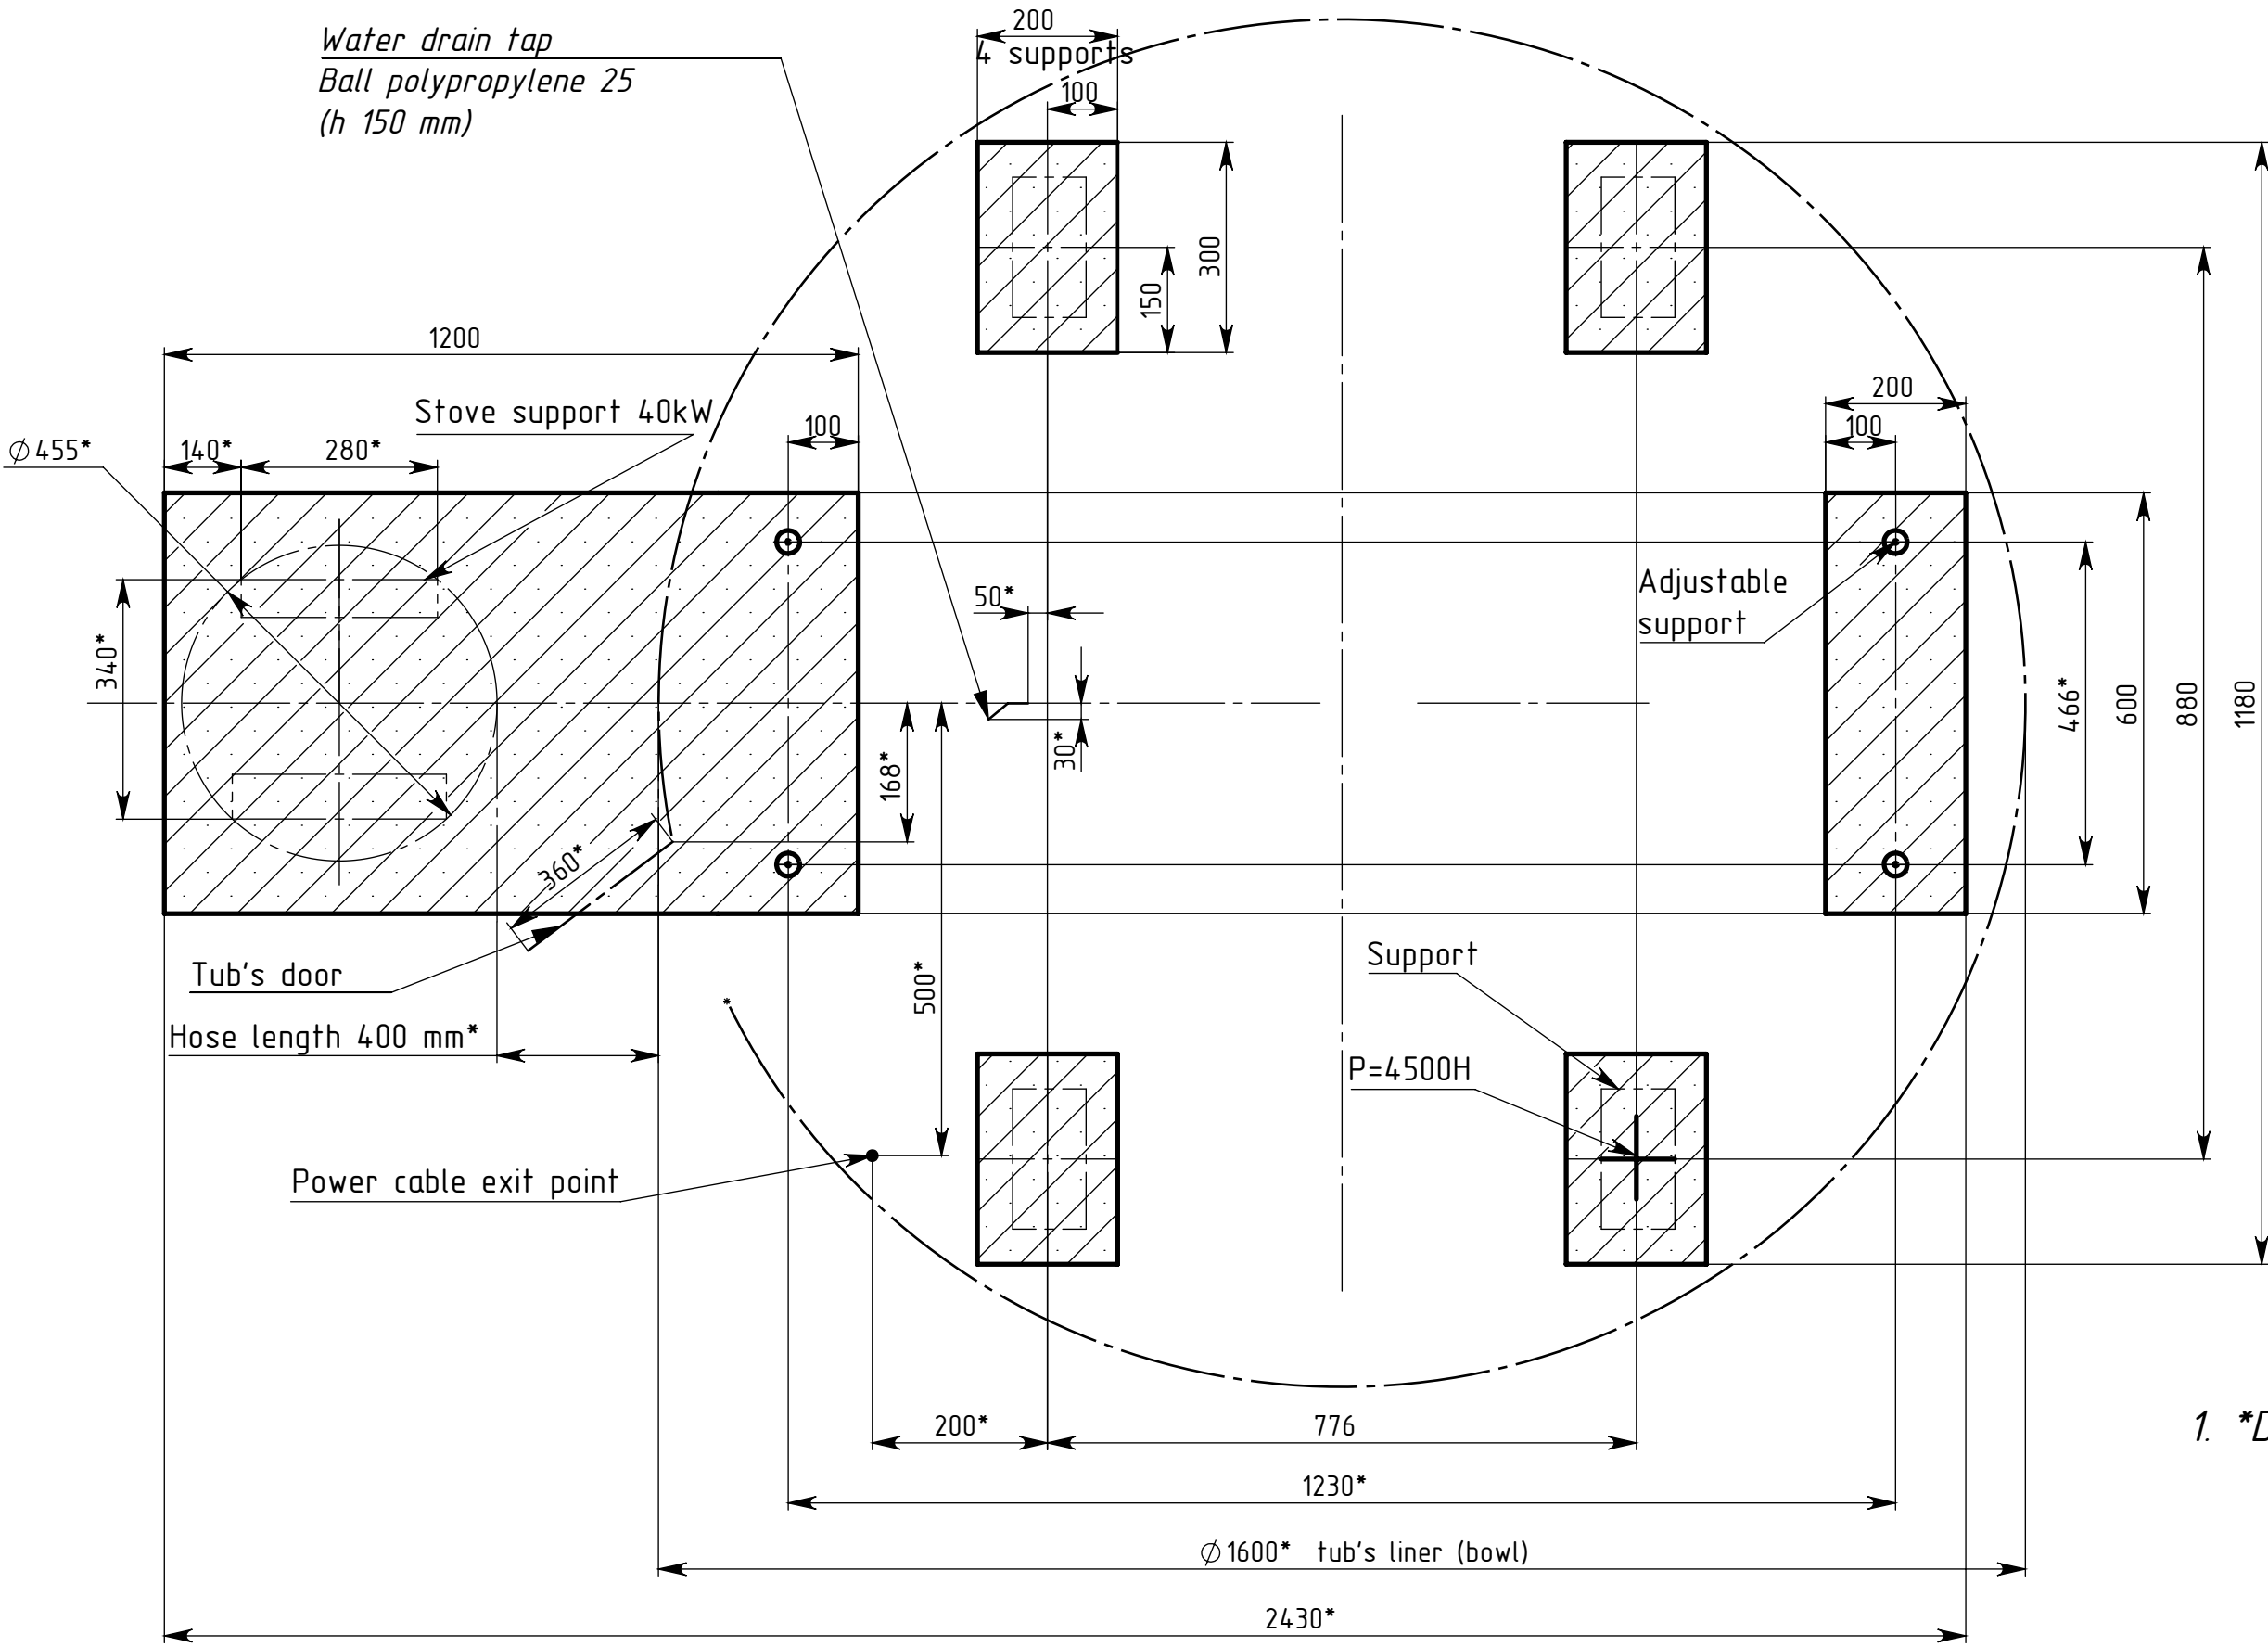

Support load	Weight, kg
Tub	170
Water	1000
People	400
General	1800
For 1 support	450

1. *Dimensions for reference.