

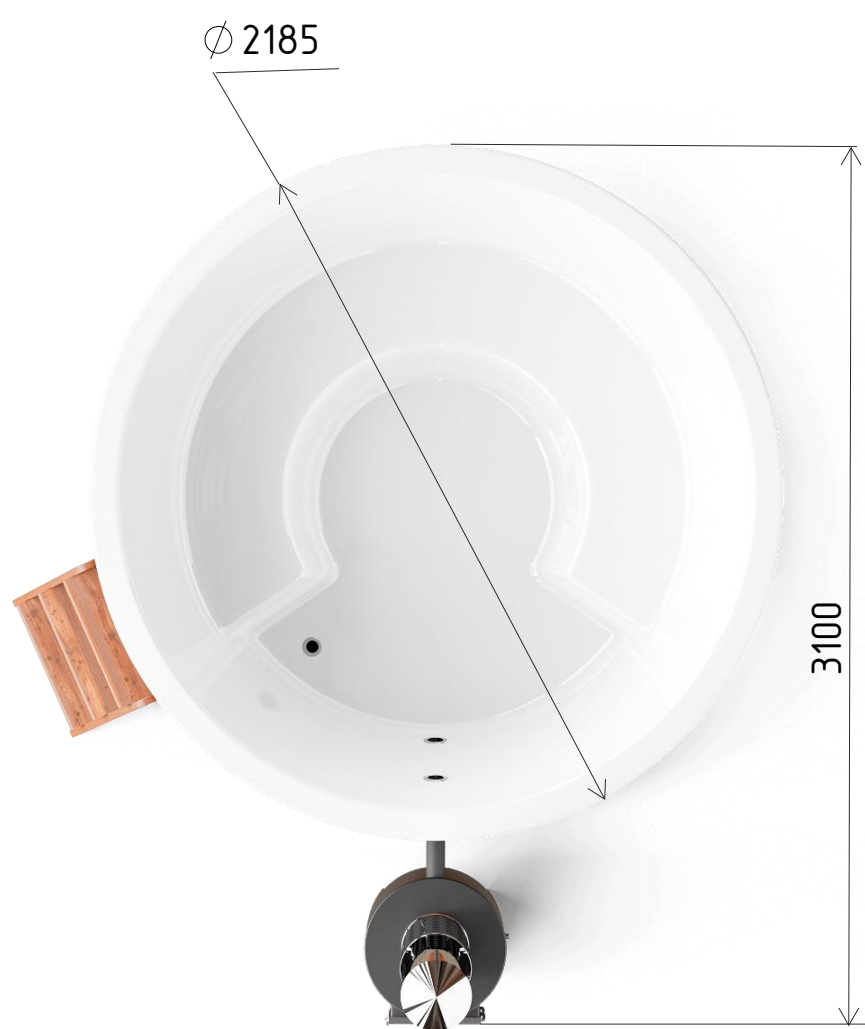
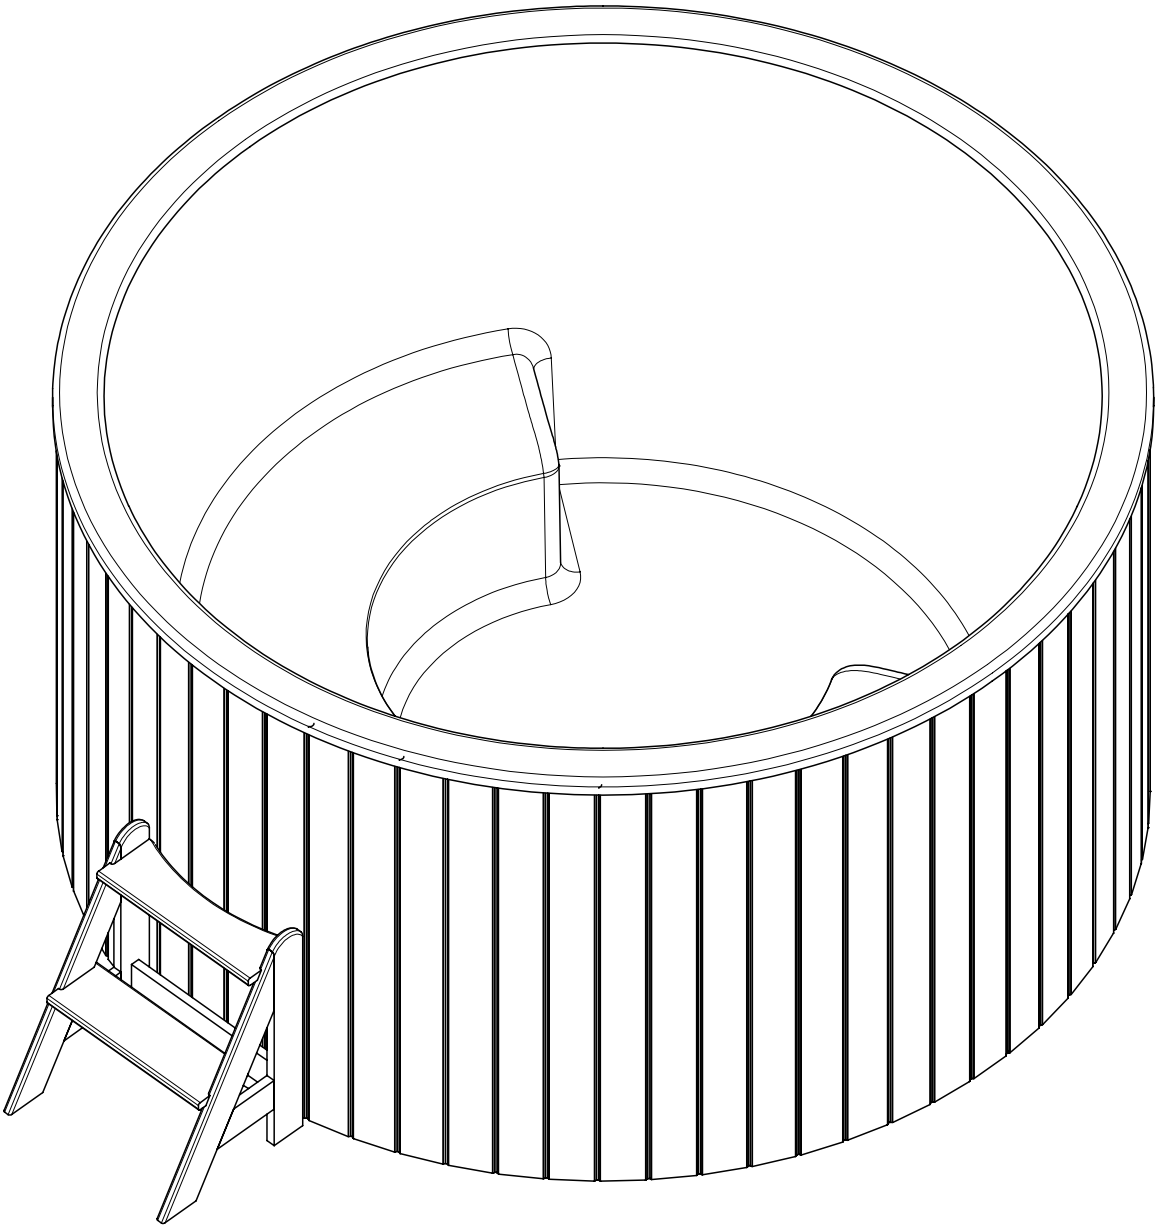
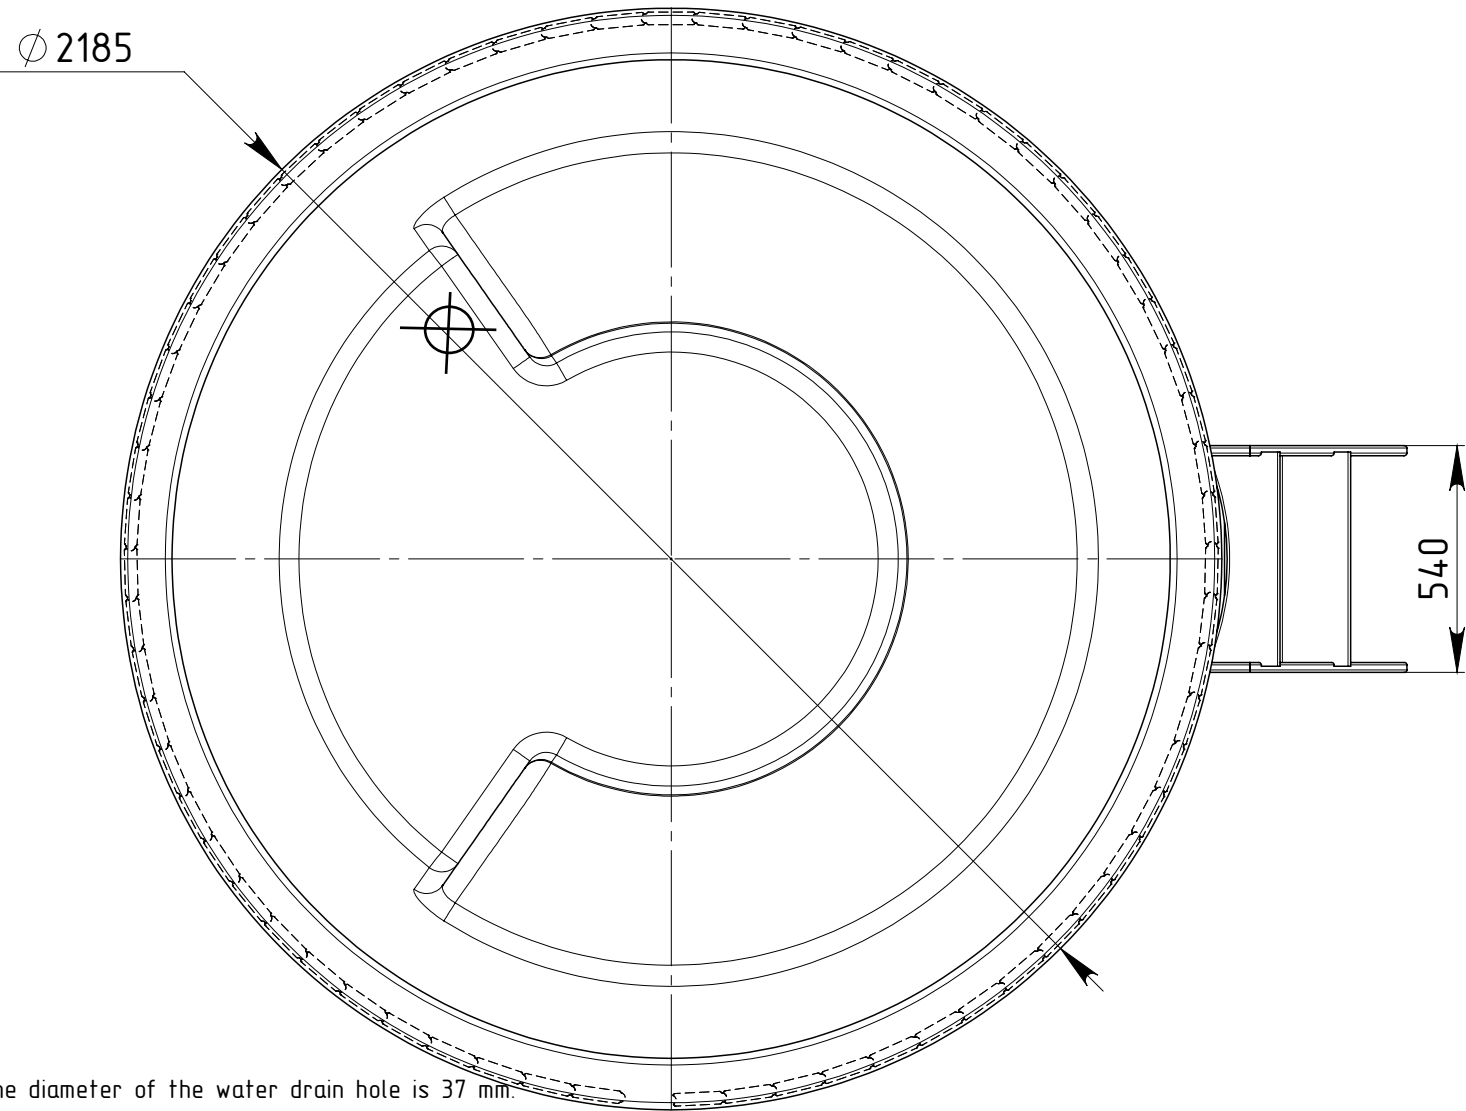


HOT TUB COMFORT FAMILY 220



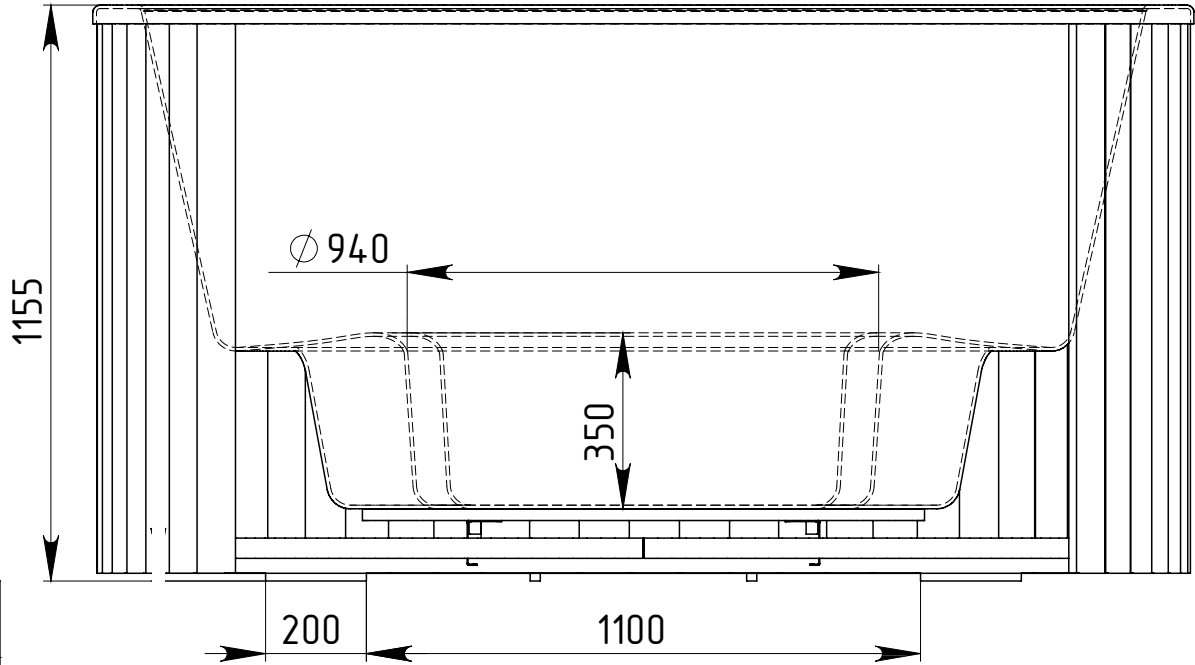


HOT TUB COMFORT FAMILY 220

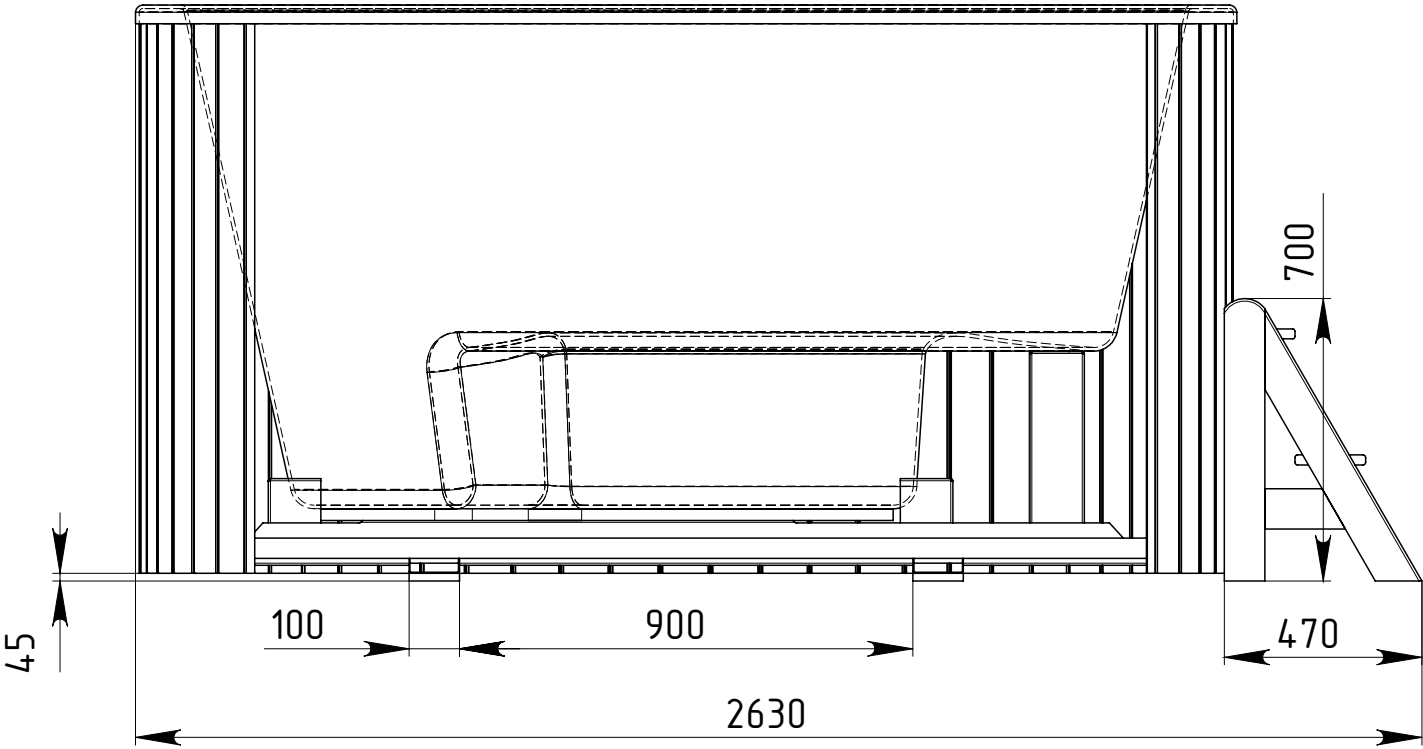


- 1. The diameter of the water drain hole is 37 mm.
- 2. Thermowood cladding diameter 2175 mm.
- 3. The hot tub kit includes a 3-step staircase.
- 4. The hot tub can be equipped with a 40 kW stove, with chimney.

METAL FRAME COMFORT FAMILY 220

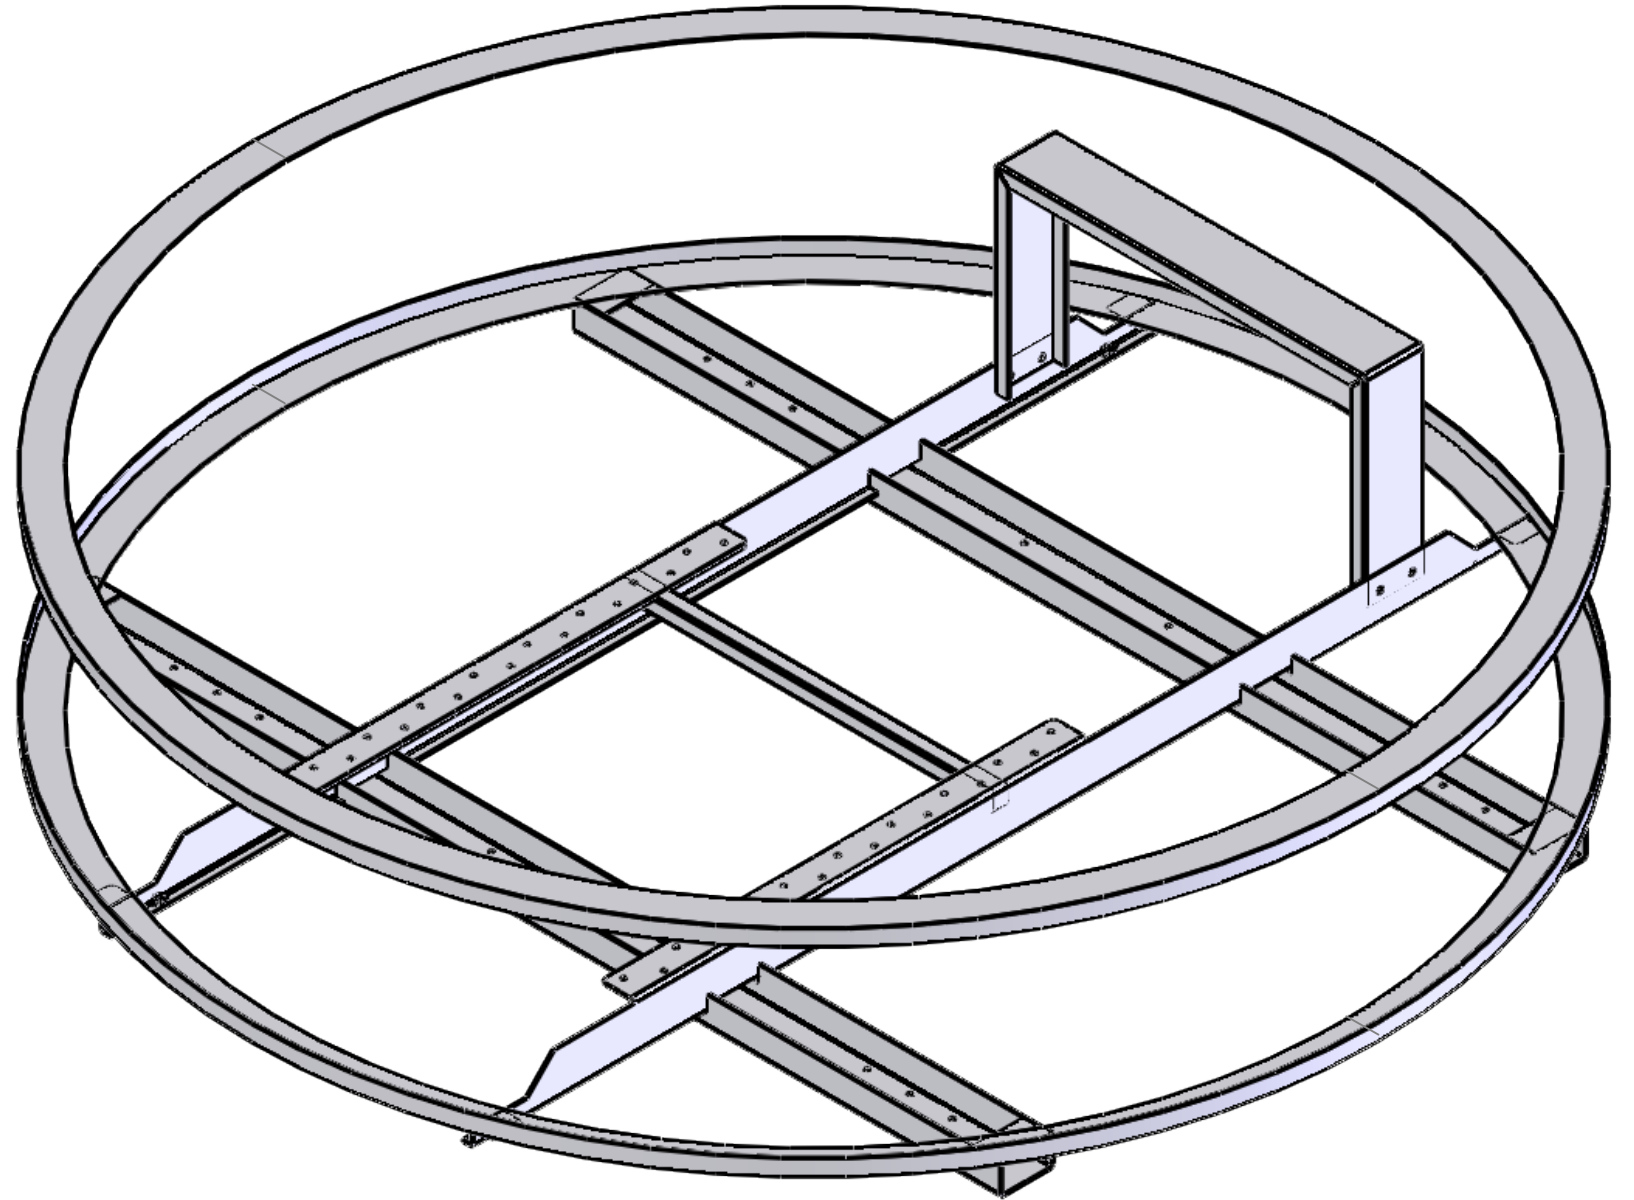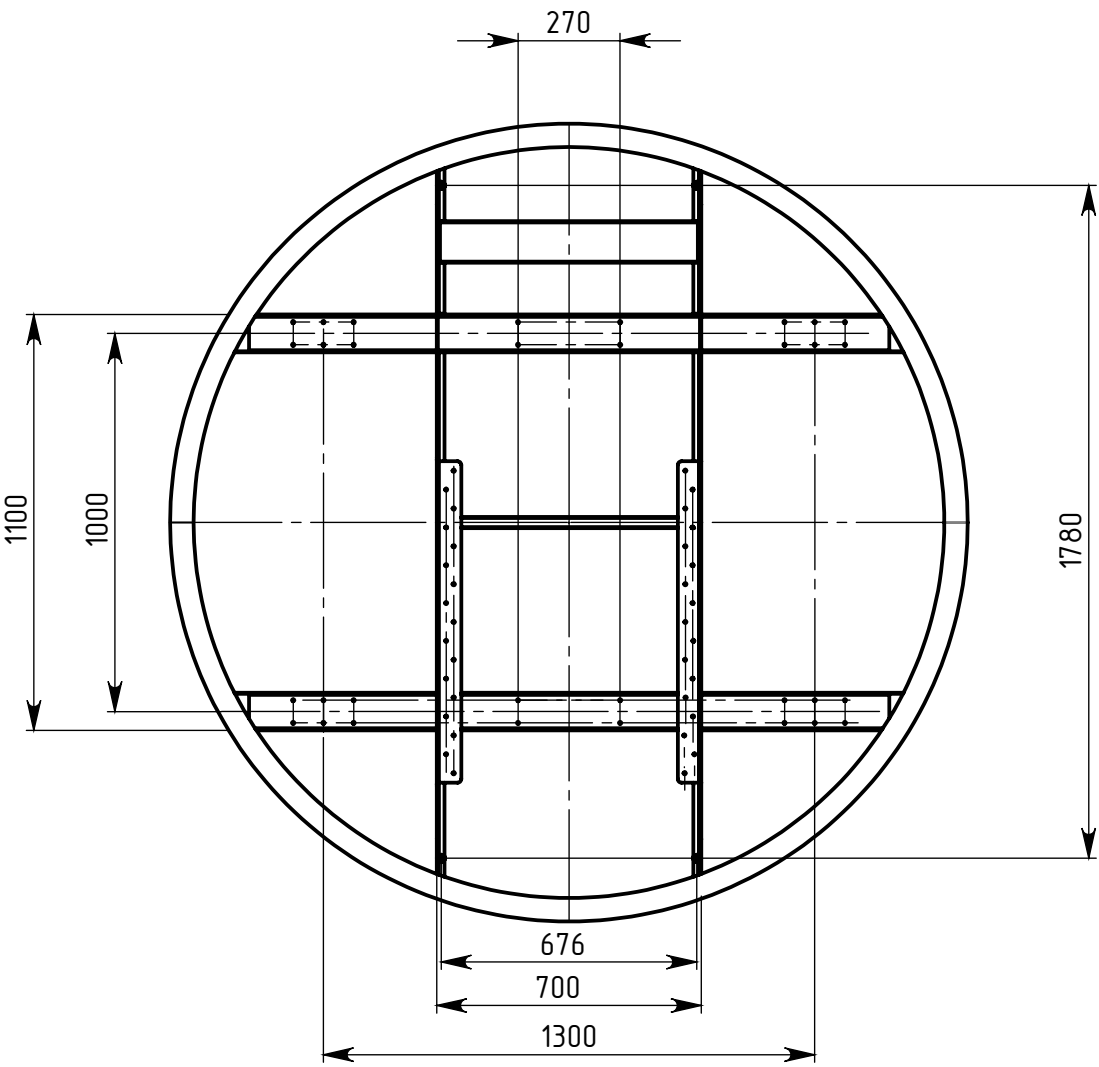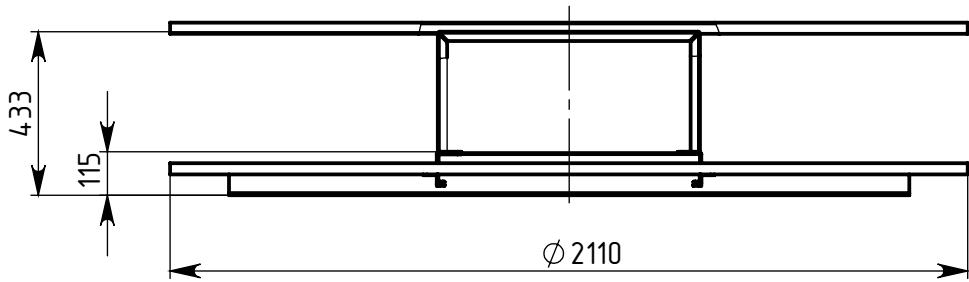

EXTERNAL STOVE 40 kW

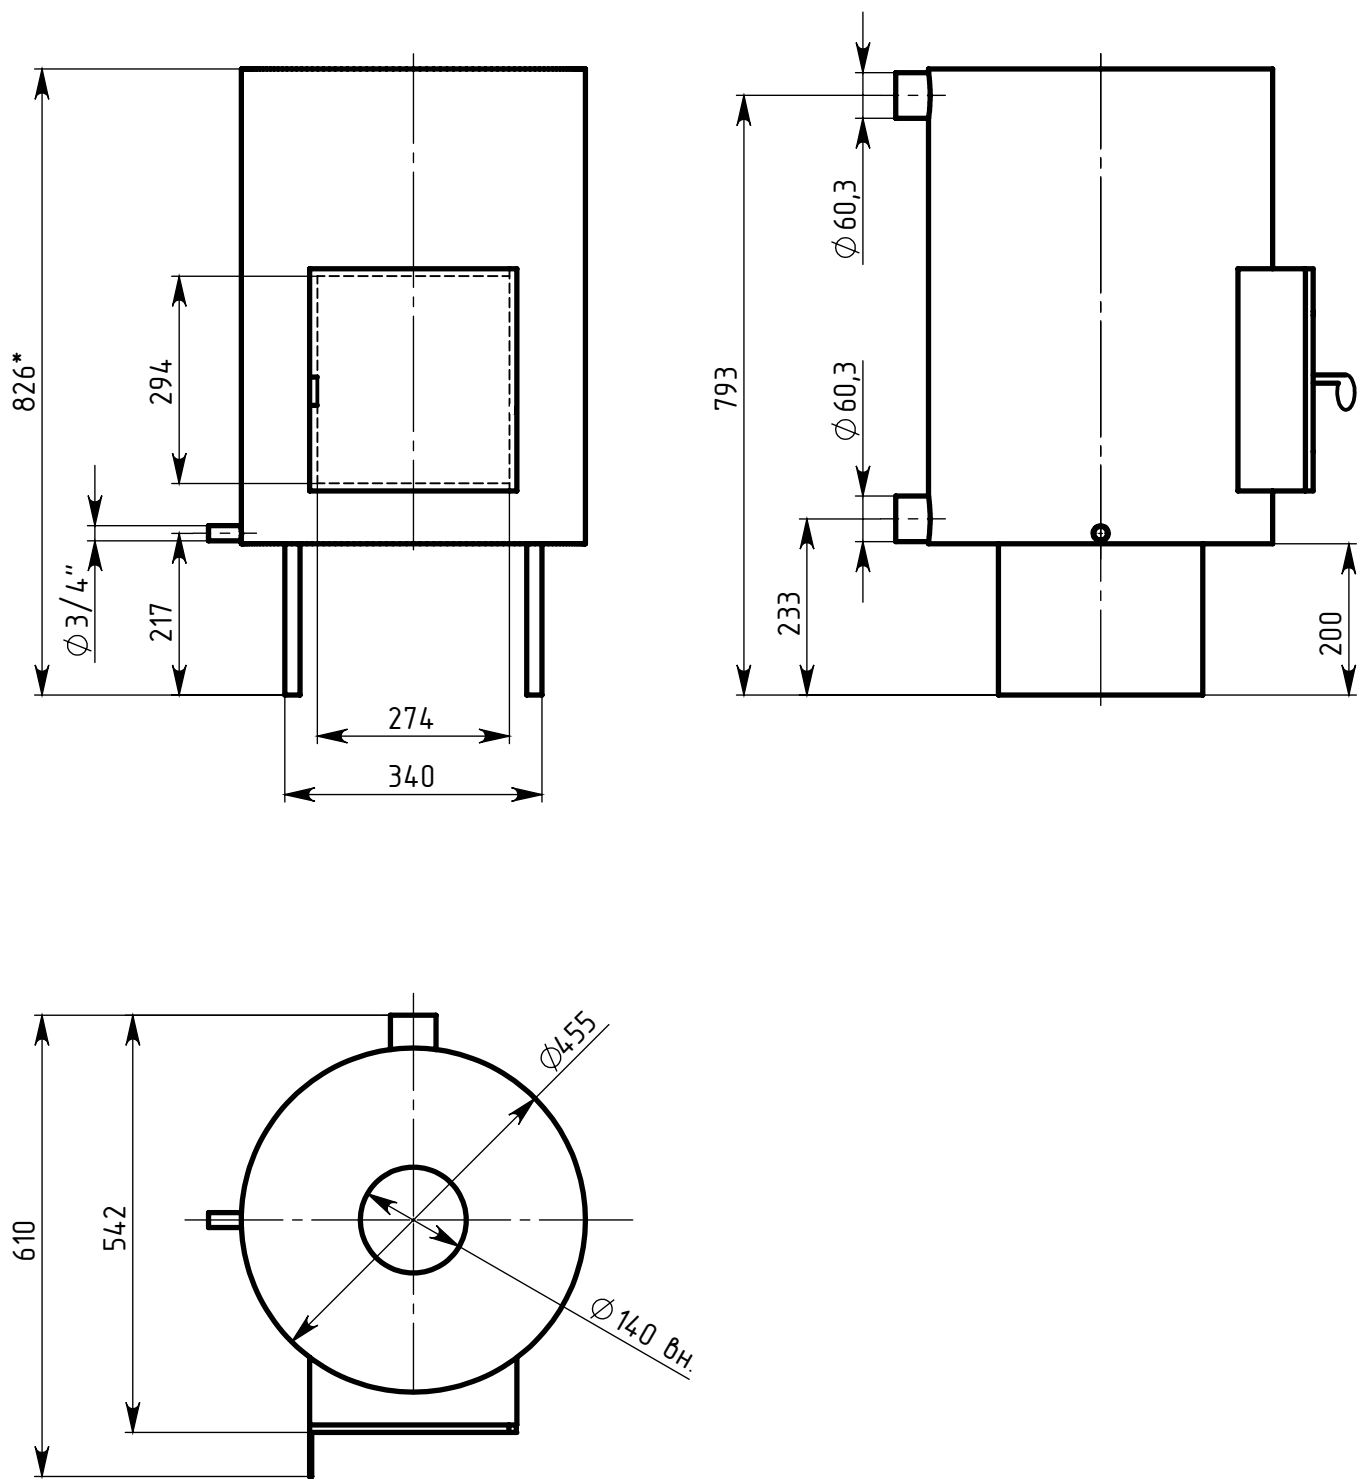

EXTERNAL STOVE 40 kW WITH CHIMNEY



Cap
200mm x 150mm

Chimney
140mm x 1000mm (2 pcs.)

Thermal protection
200mm x 1000mm

External stove
diameter 455mm, 826mm

Total height of the chimney with
stove 2850 mm

Staircase for hot tub, thermo pine (light)




Width: 470 mm

Length: 540 mm

Height: 700 mm


Foundation plan for installing COMFORT FAMILY 220 COLD (support surfaces)

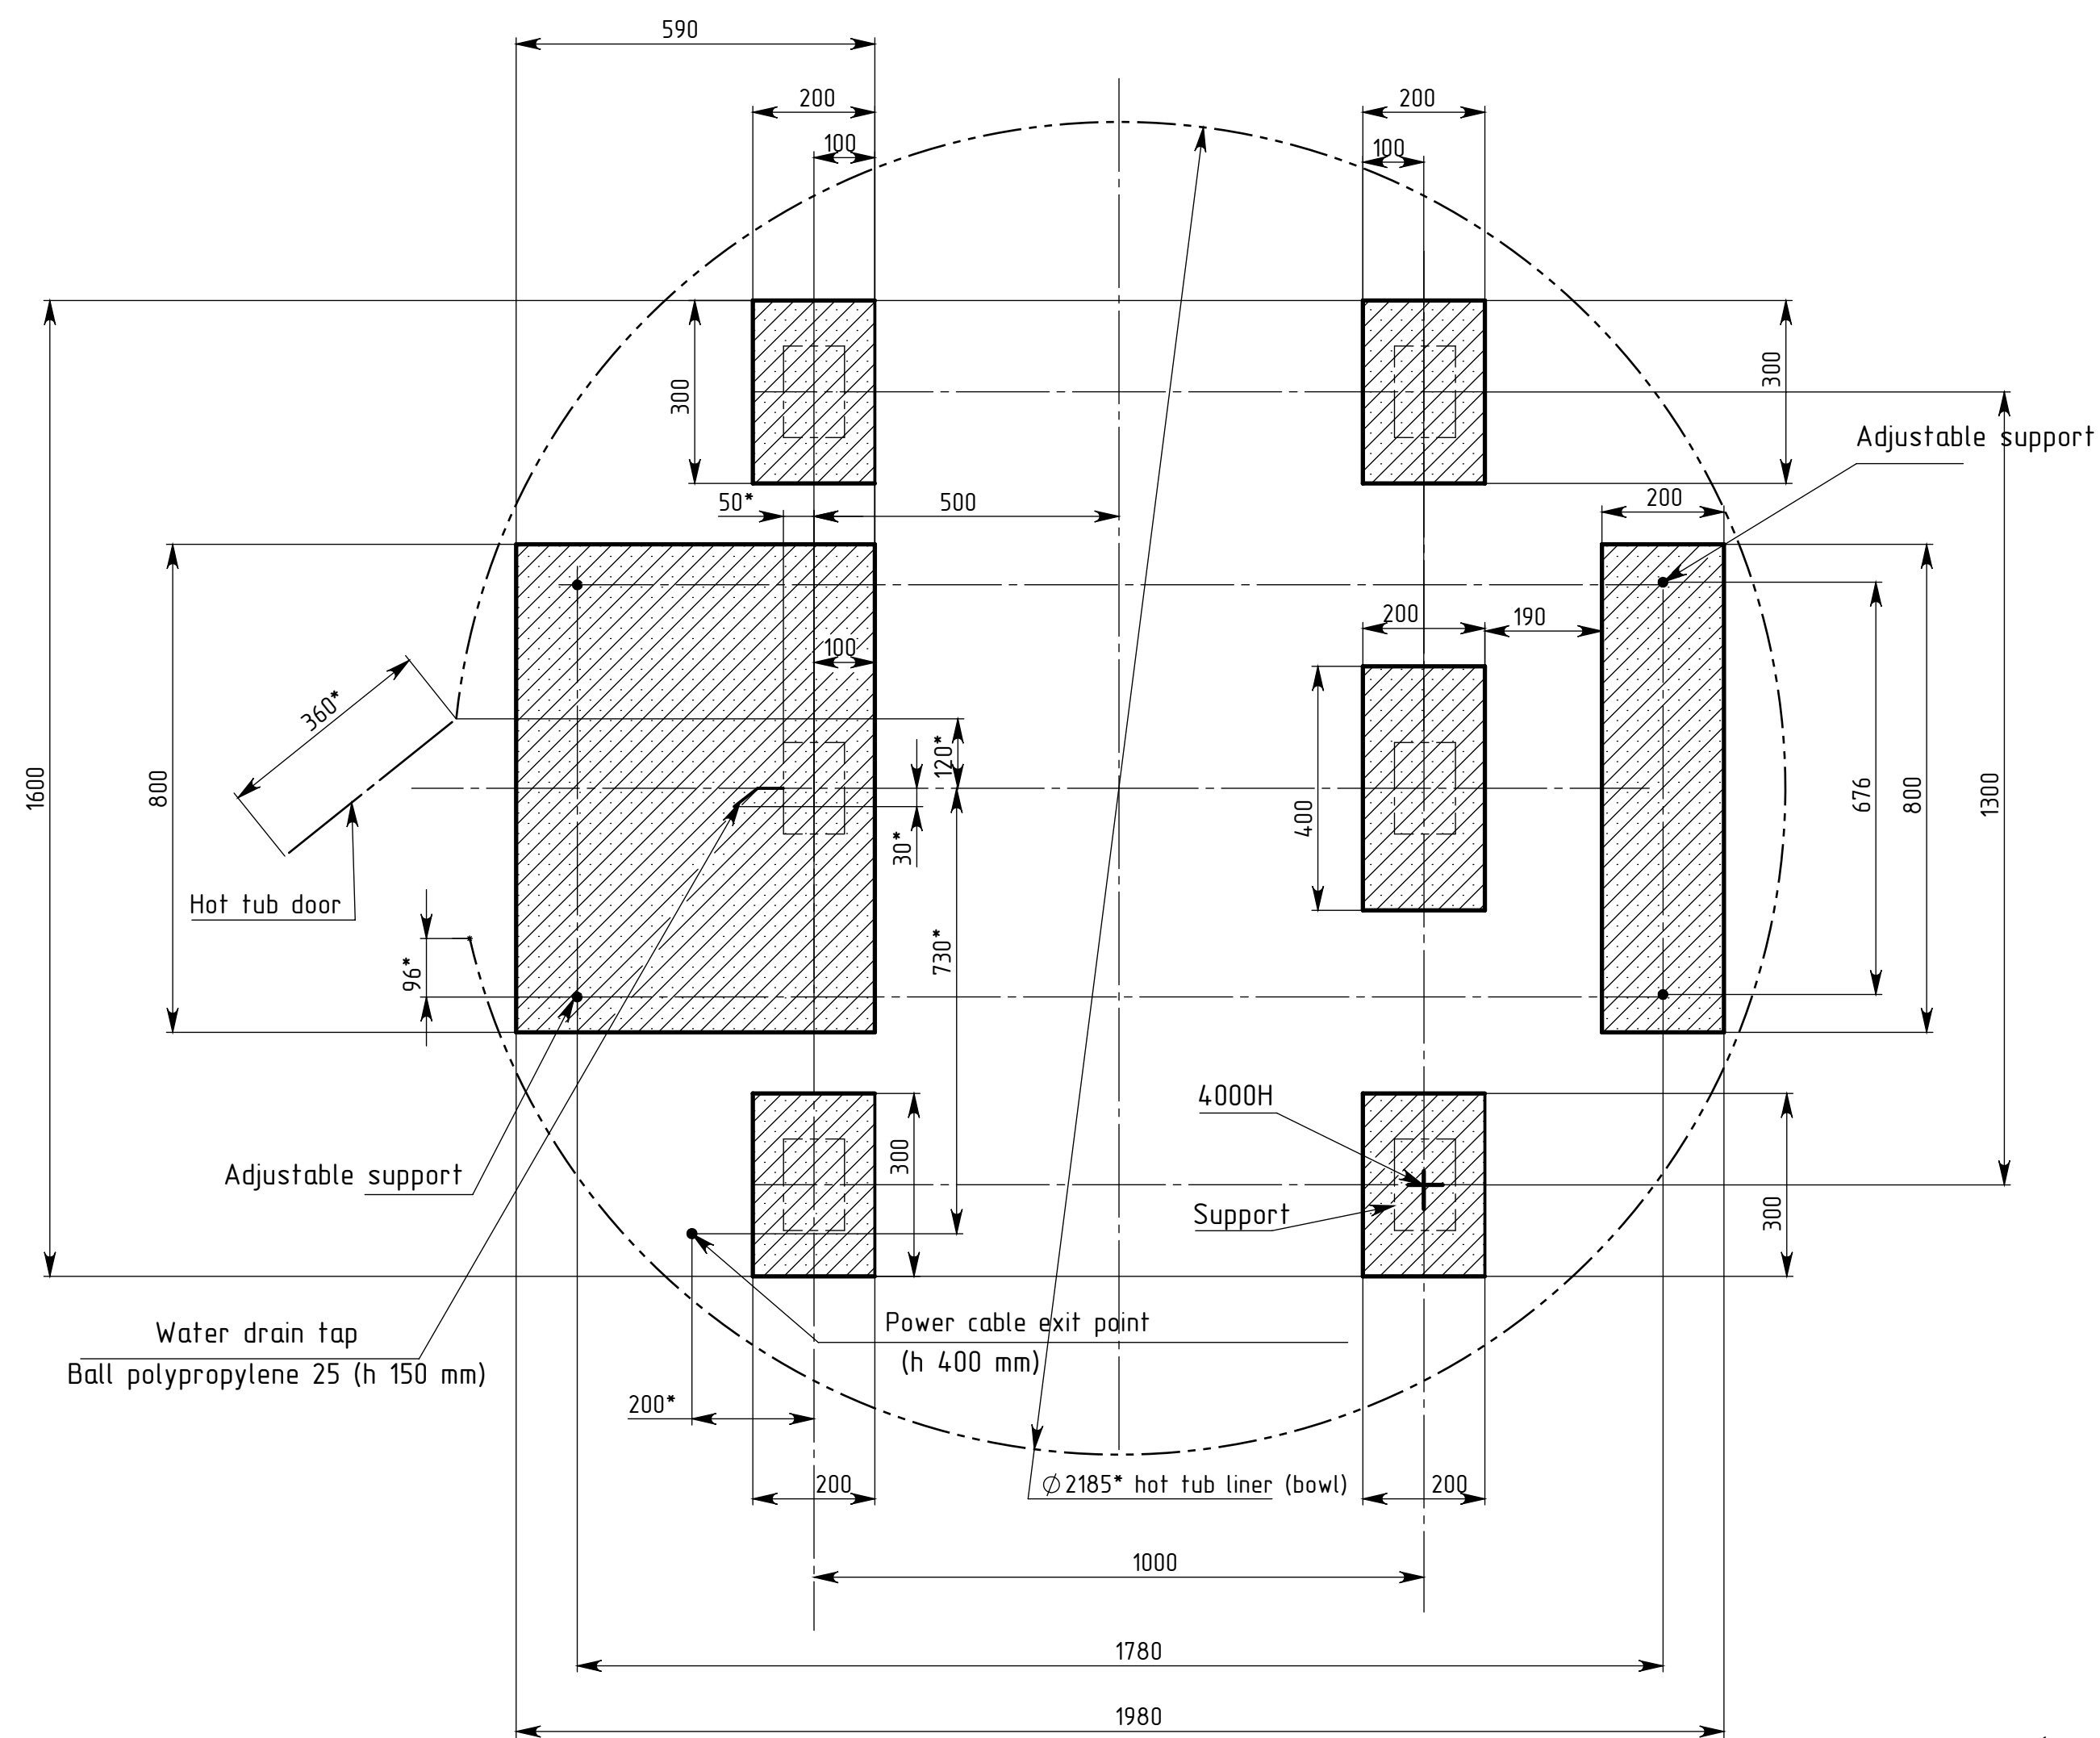

Support load	Weight, kg
Hot tub	250
Water	1650
People	500
General	2400
For 1 support ₄	

1. *Dimensions for reference.
2. Diameter of the drain hole is 37 mm

**Foundation plan for installing
COMFORT FAMILY 220 HOT TUB WITH EXTERNAL
STOVE 40 kW (support surfaces)**

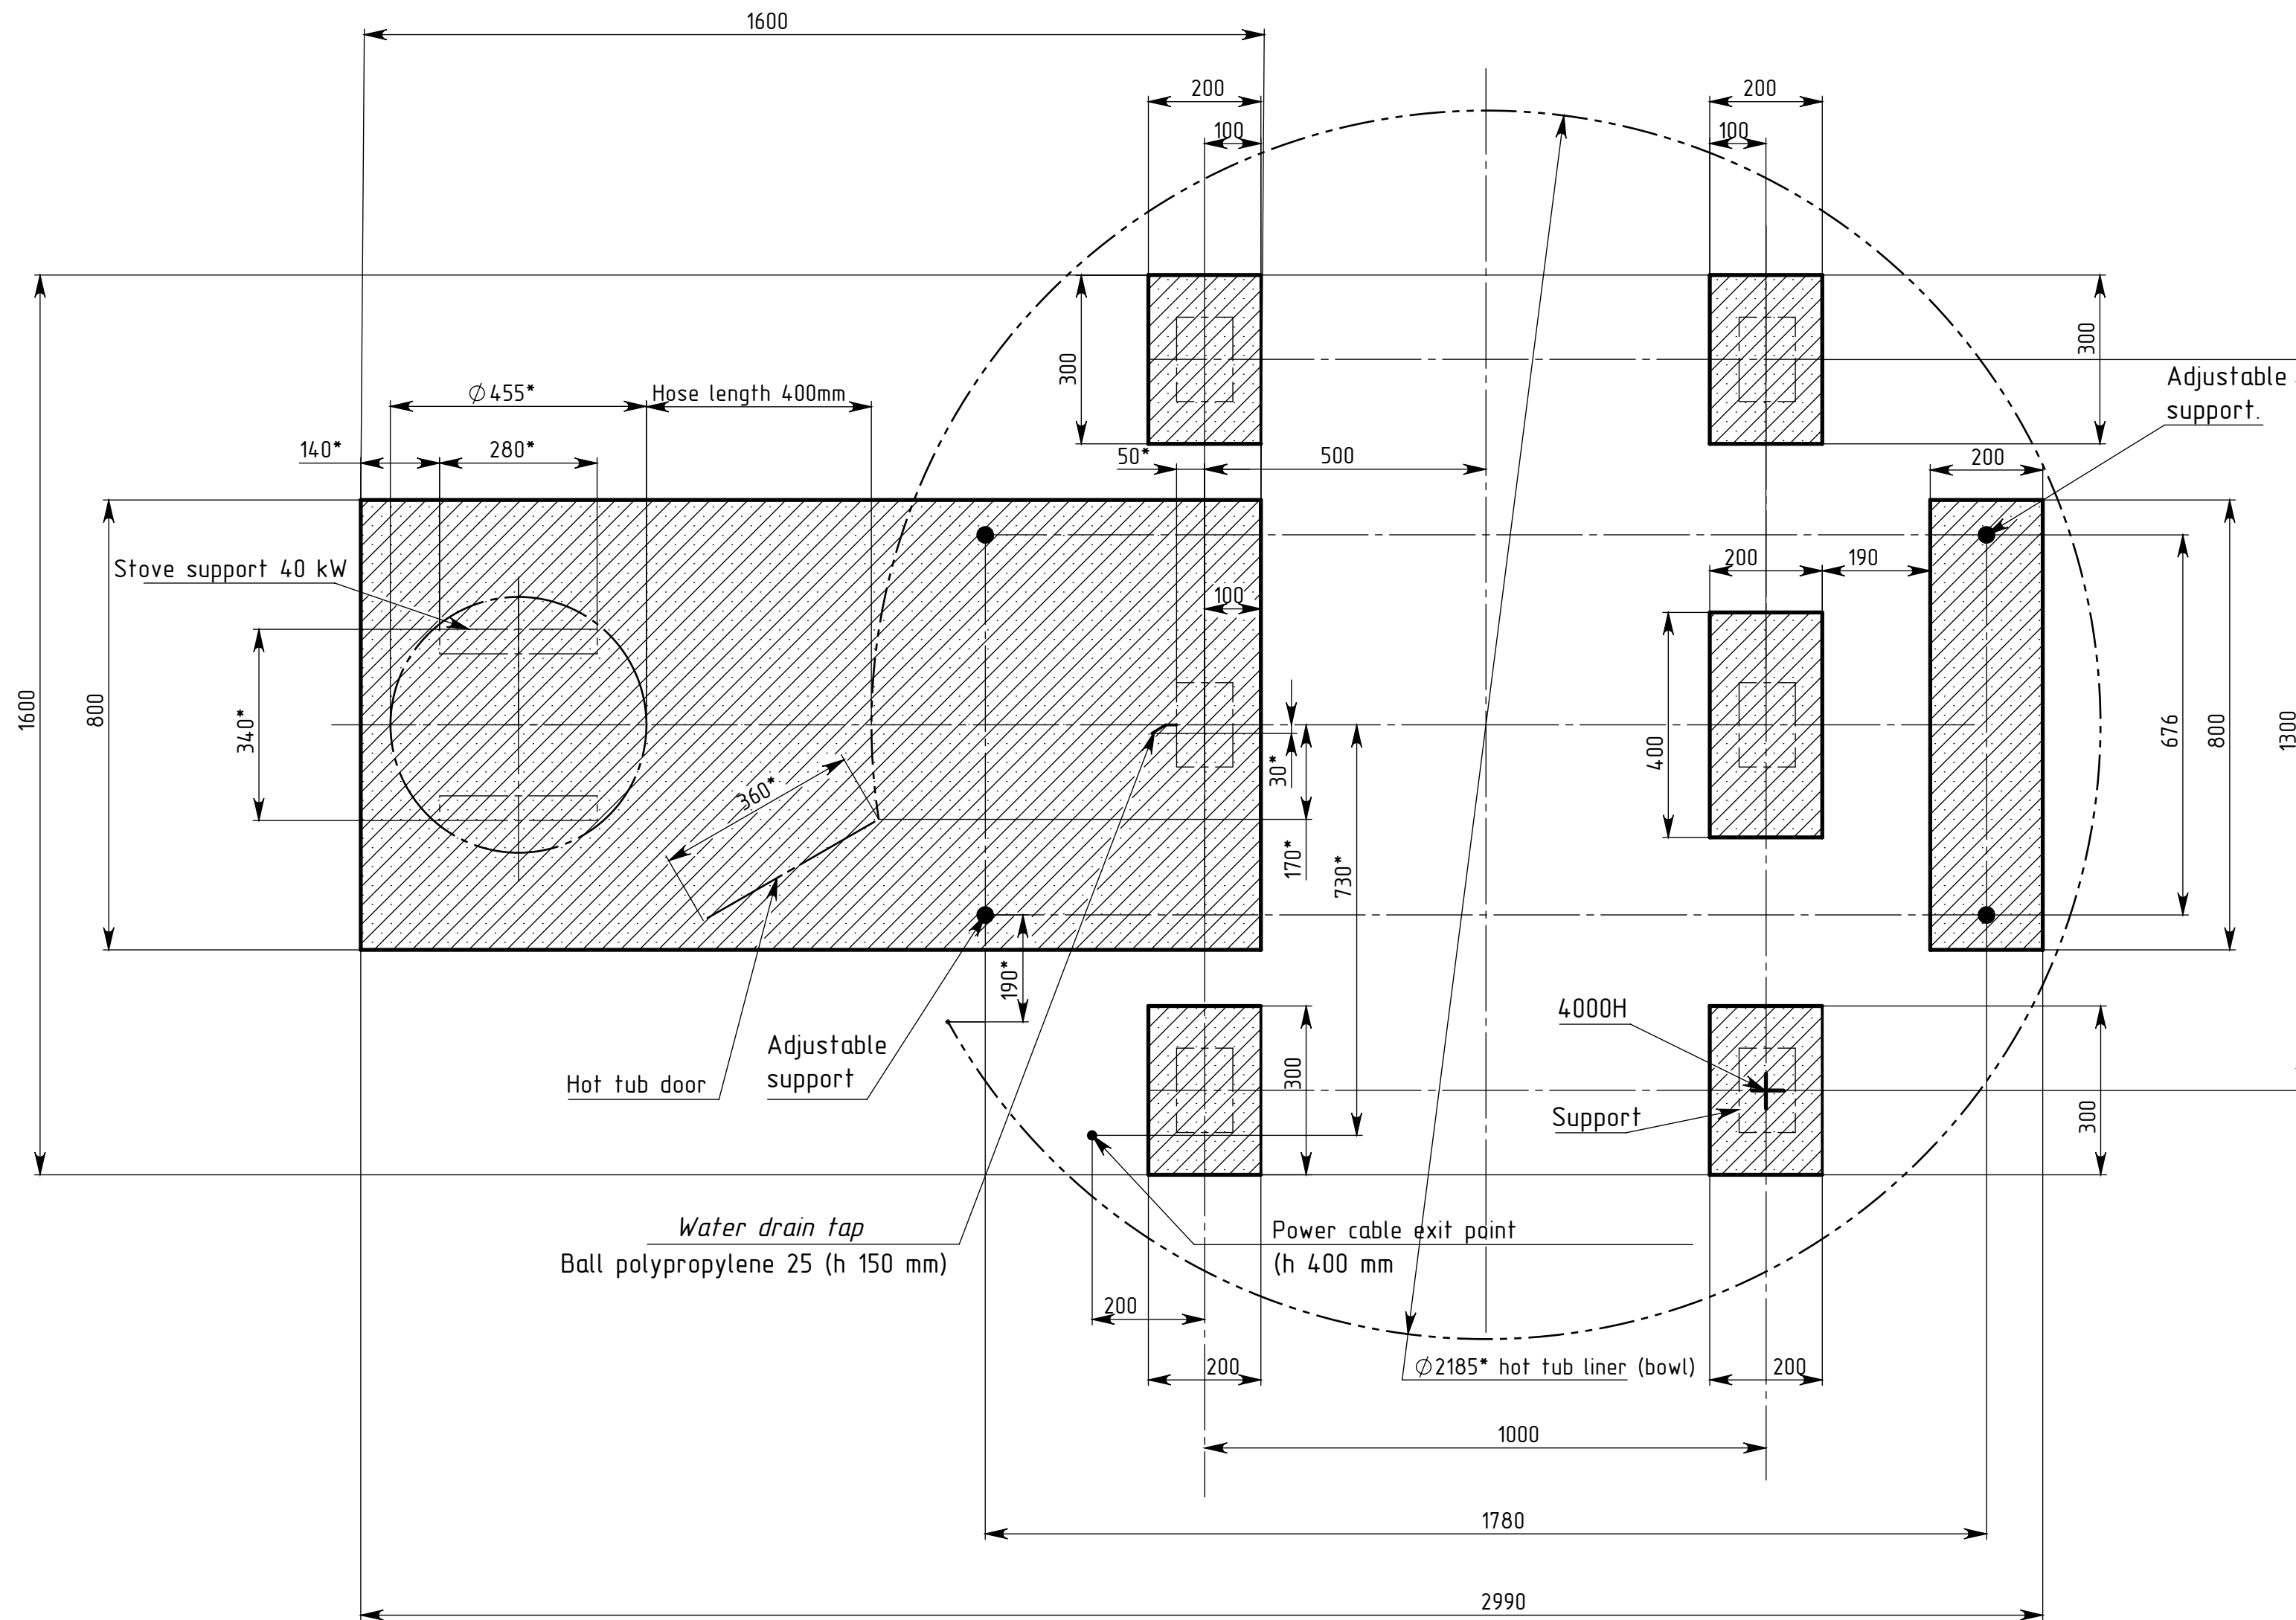

Support load	Weight, kg
Hot tub	250
Water	1650
People	500
General	2400
For 1 support (6 supports)	400

1. *Dimensions for reference.
2. Diameter of the drain hole is 37 mm. ϕ