

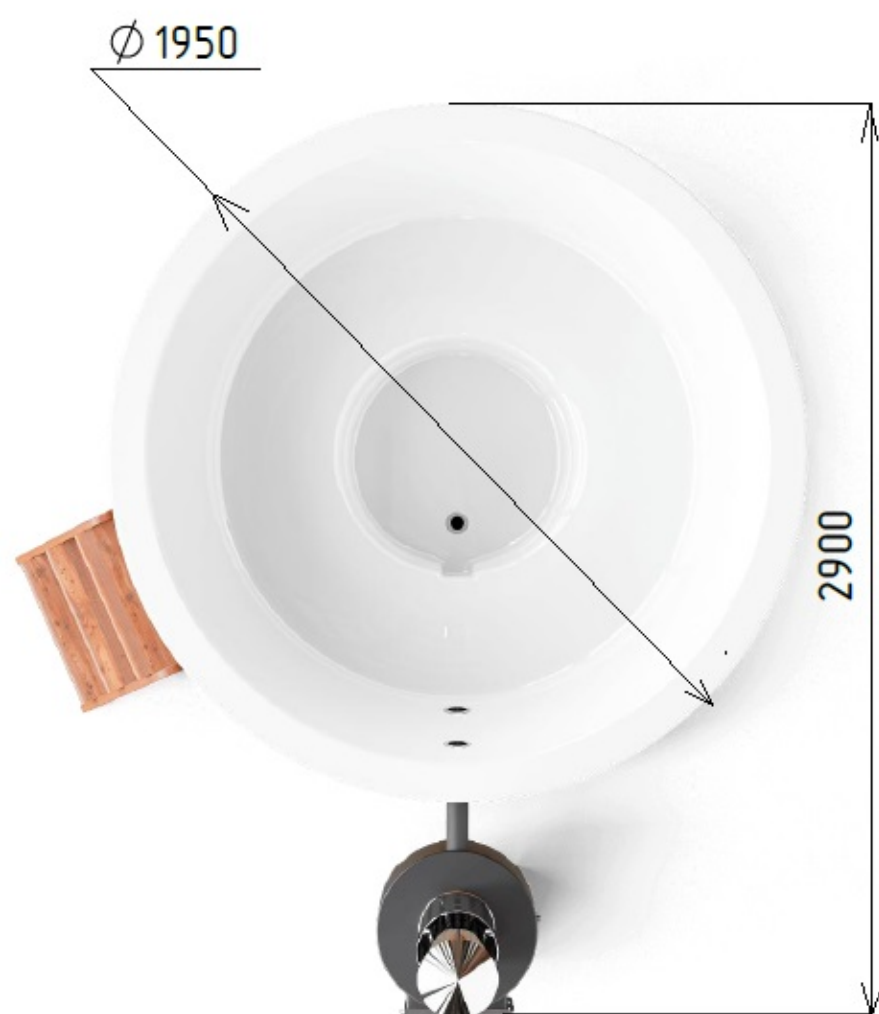
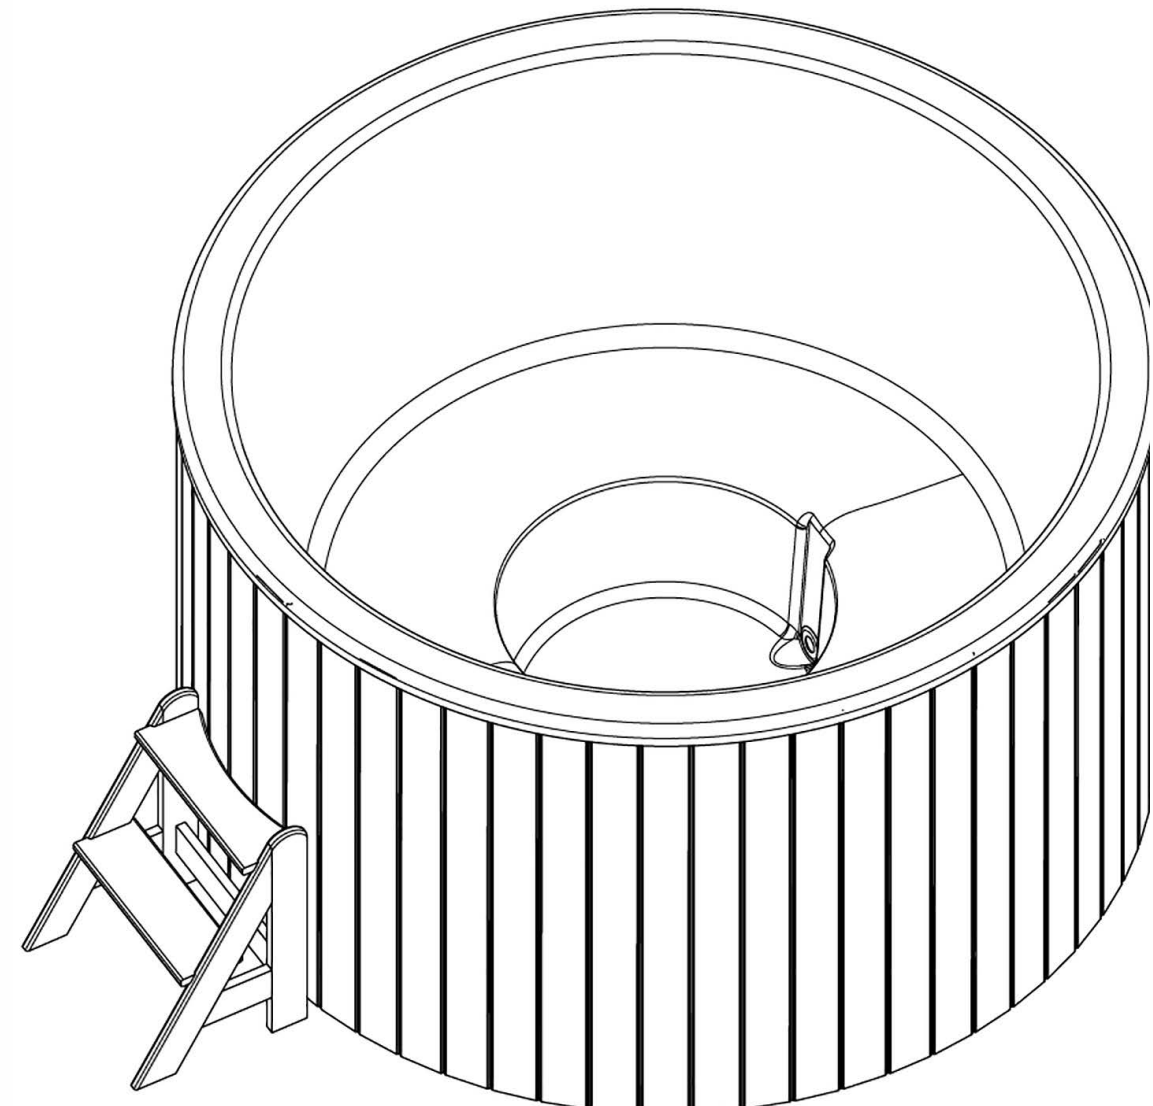
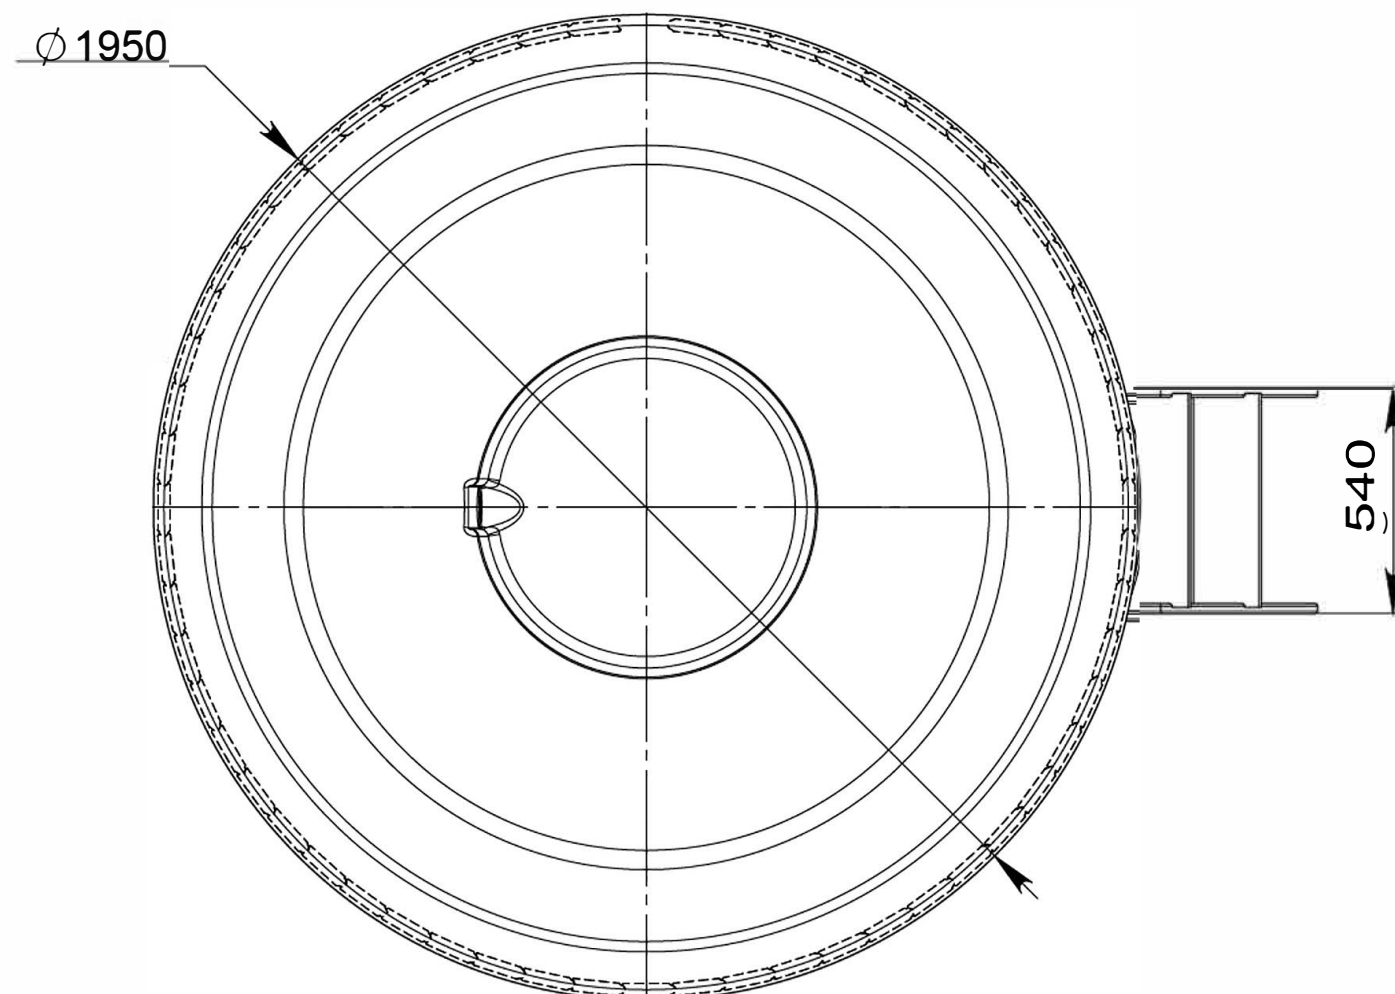


# HOT TUB COMFORT 195

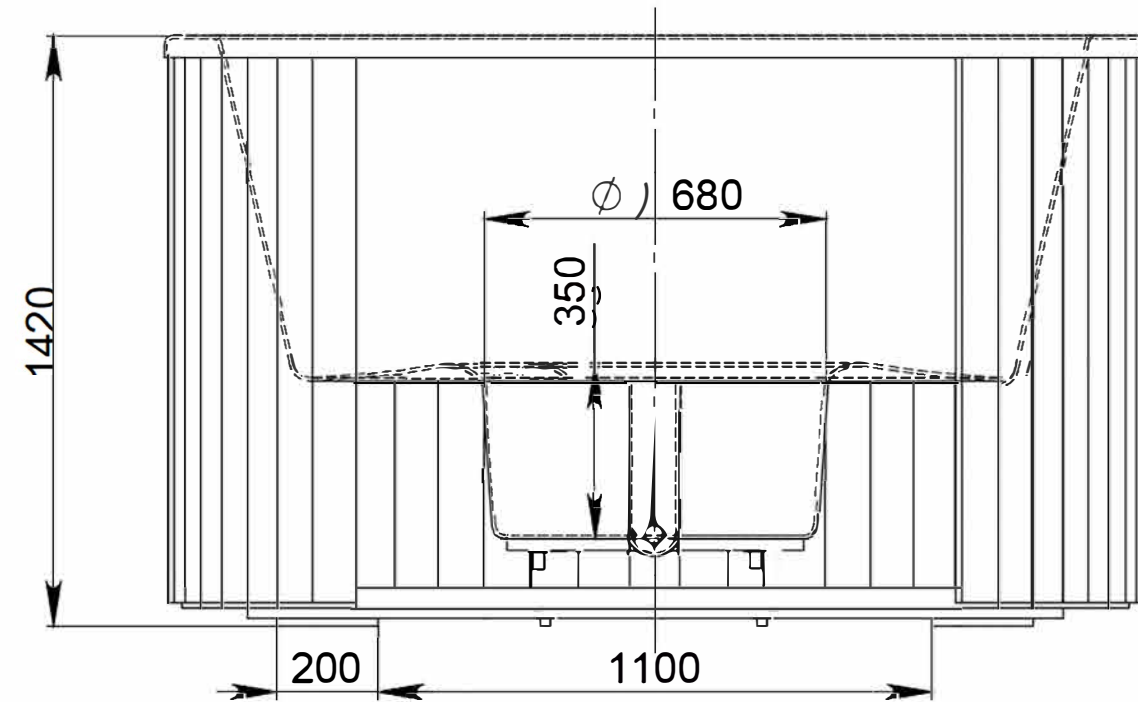


# HOT TUB COMFORT 195

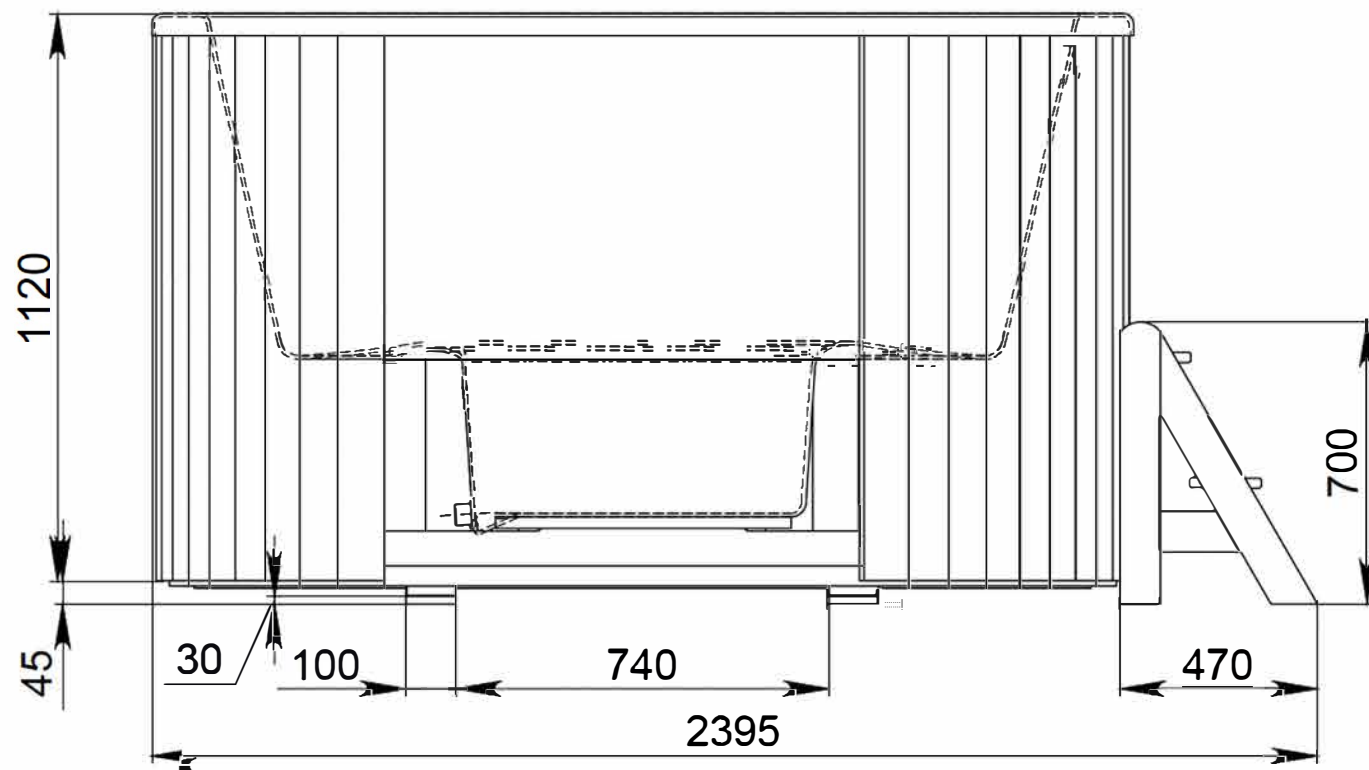



1. The diameter of the water drain hole is 37 mm.
2. Thermowood cladding diameter 2175 mm.
3. The hot tub kit includes a 3-step staircase.
4. The hot tub can be equipped with a 40 kW stove, with chimney.

# Composite liner (bowl)


## COMFORT 195

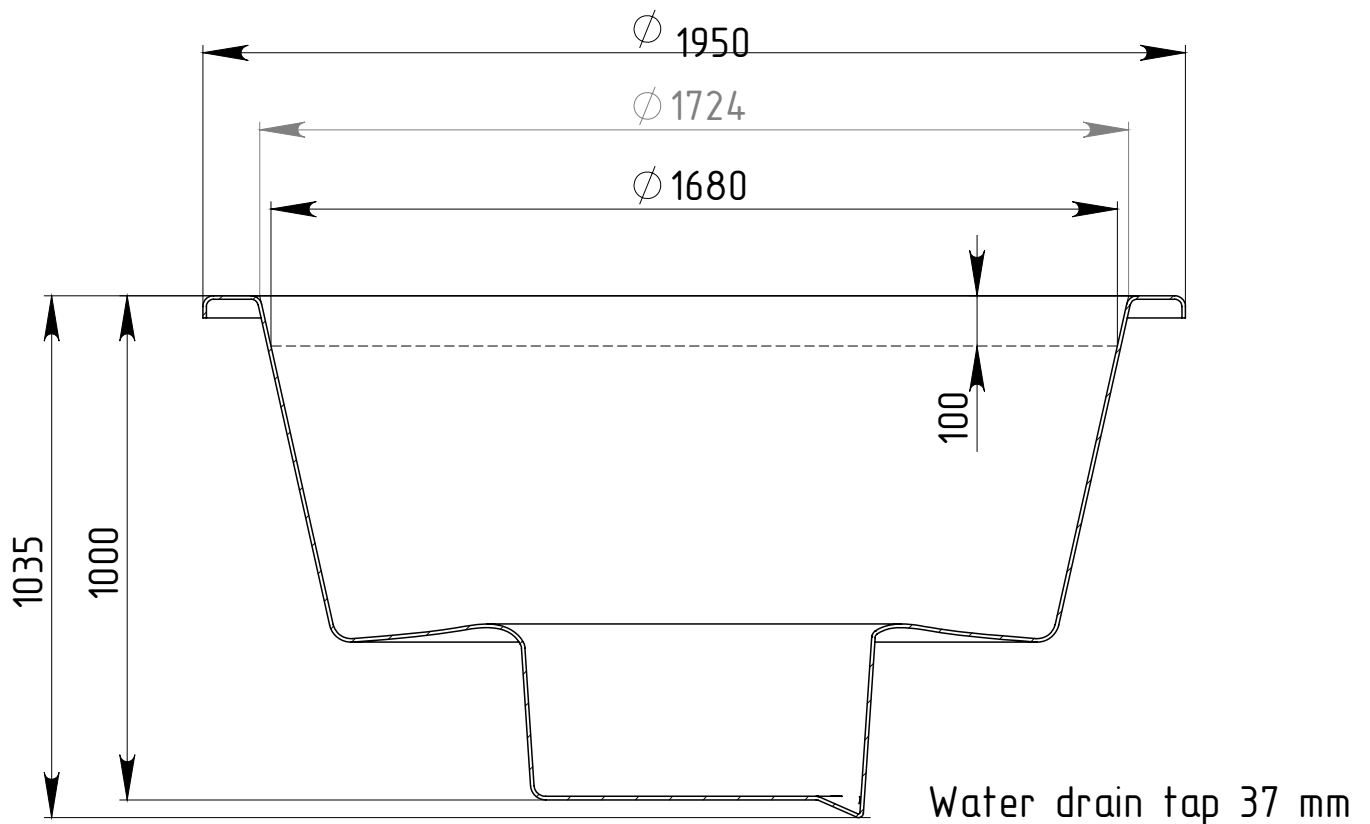

# METAL FRAME COMFORT 195

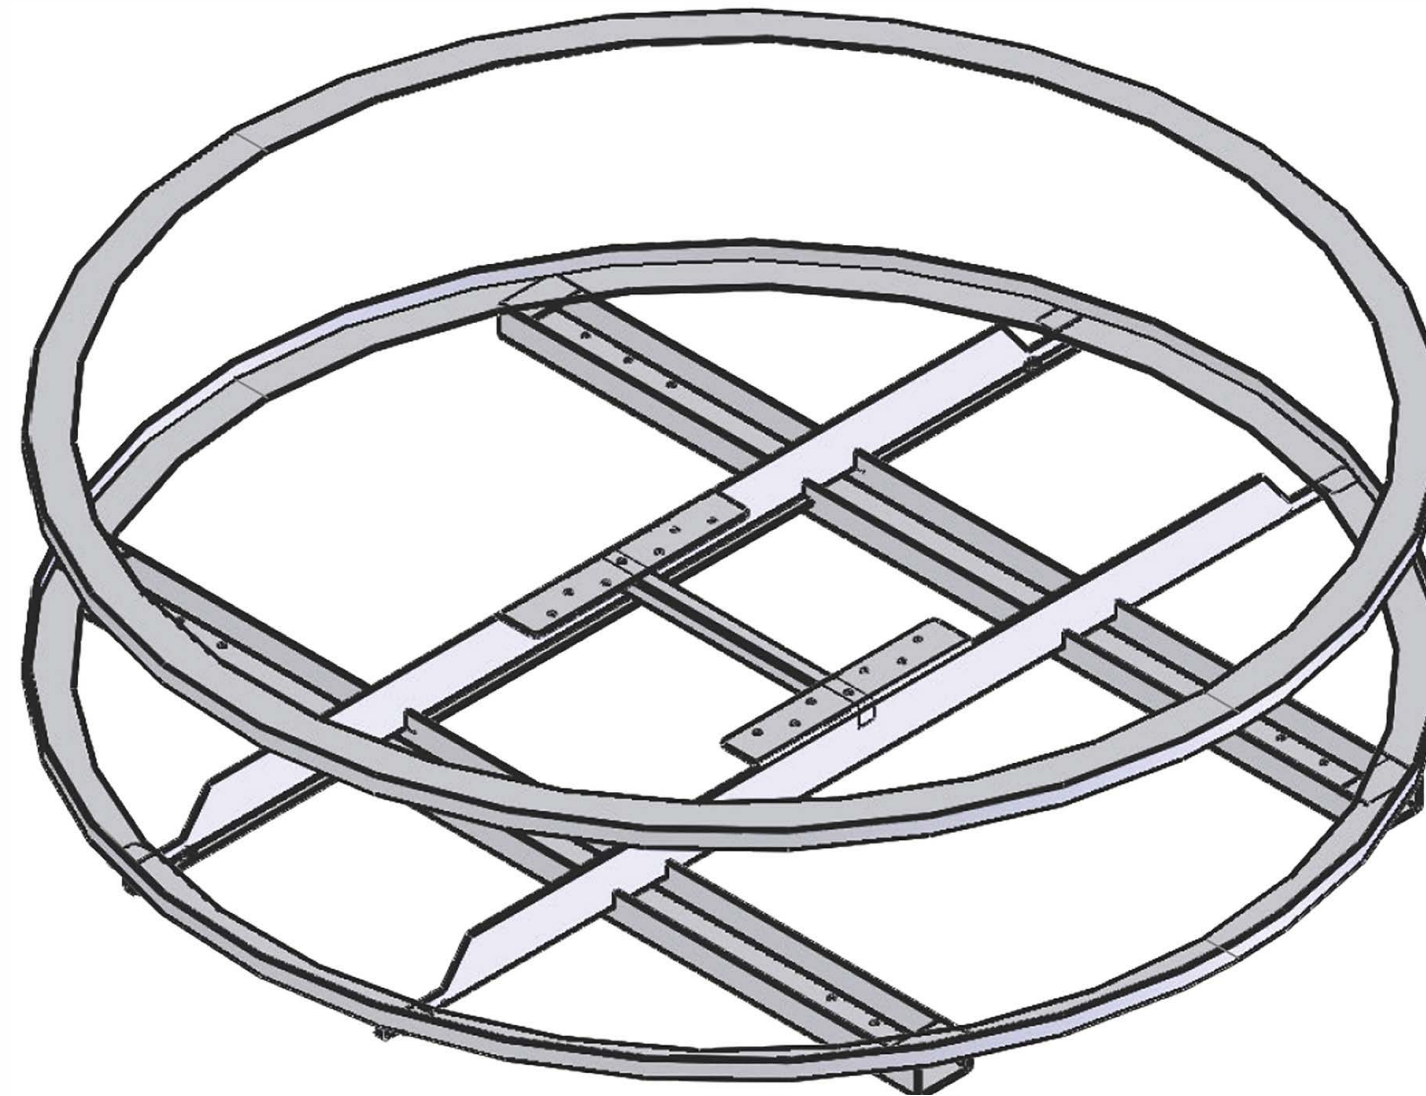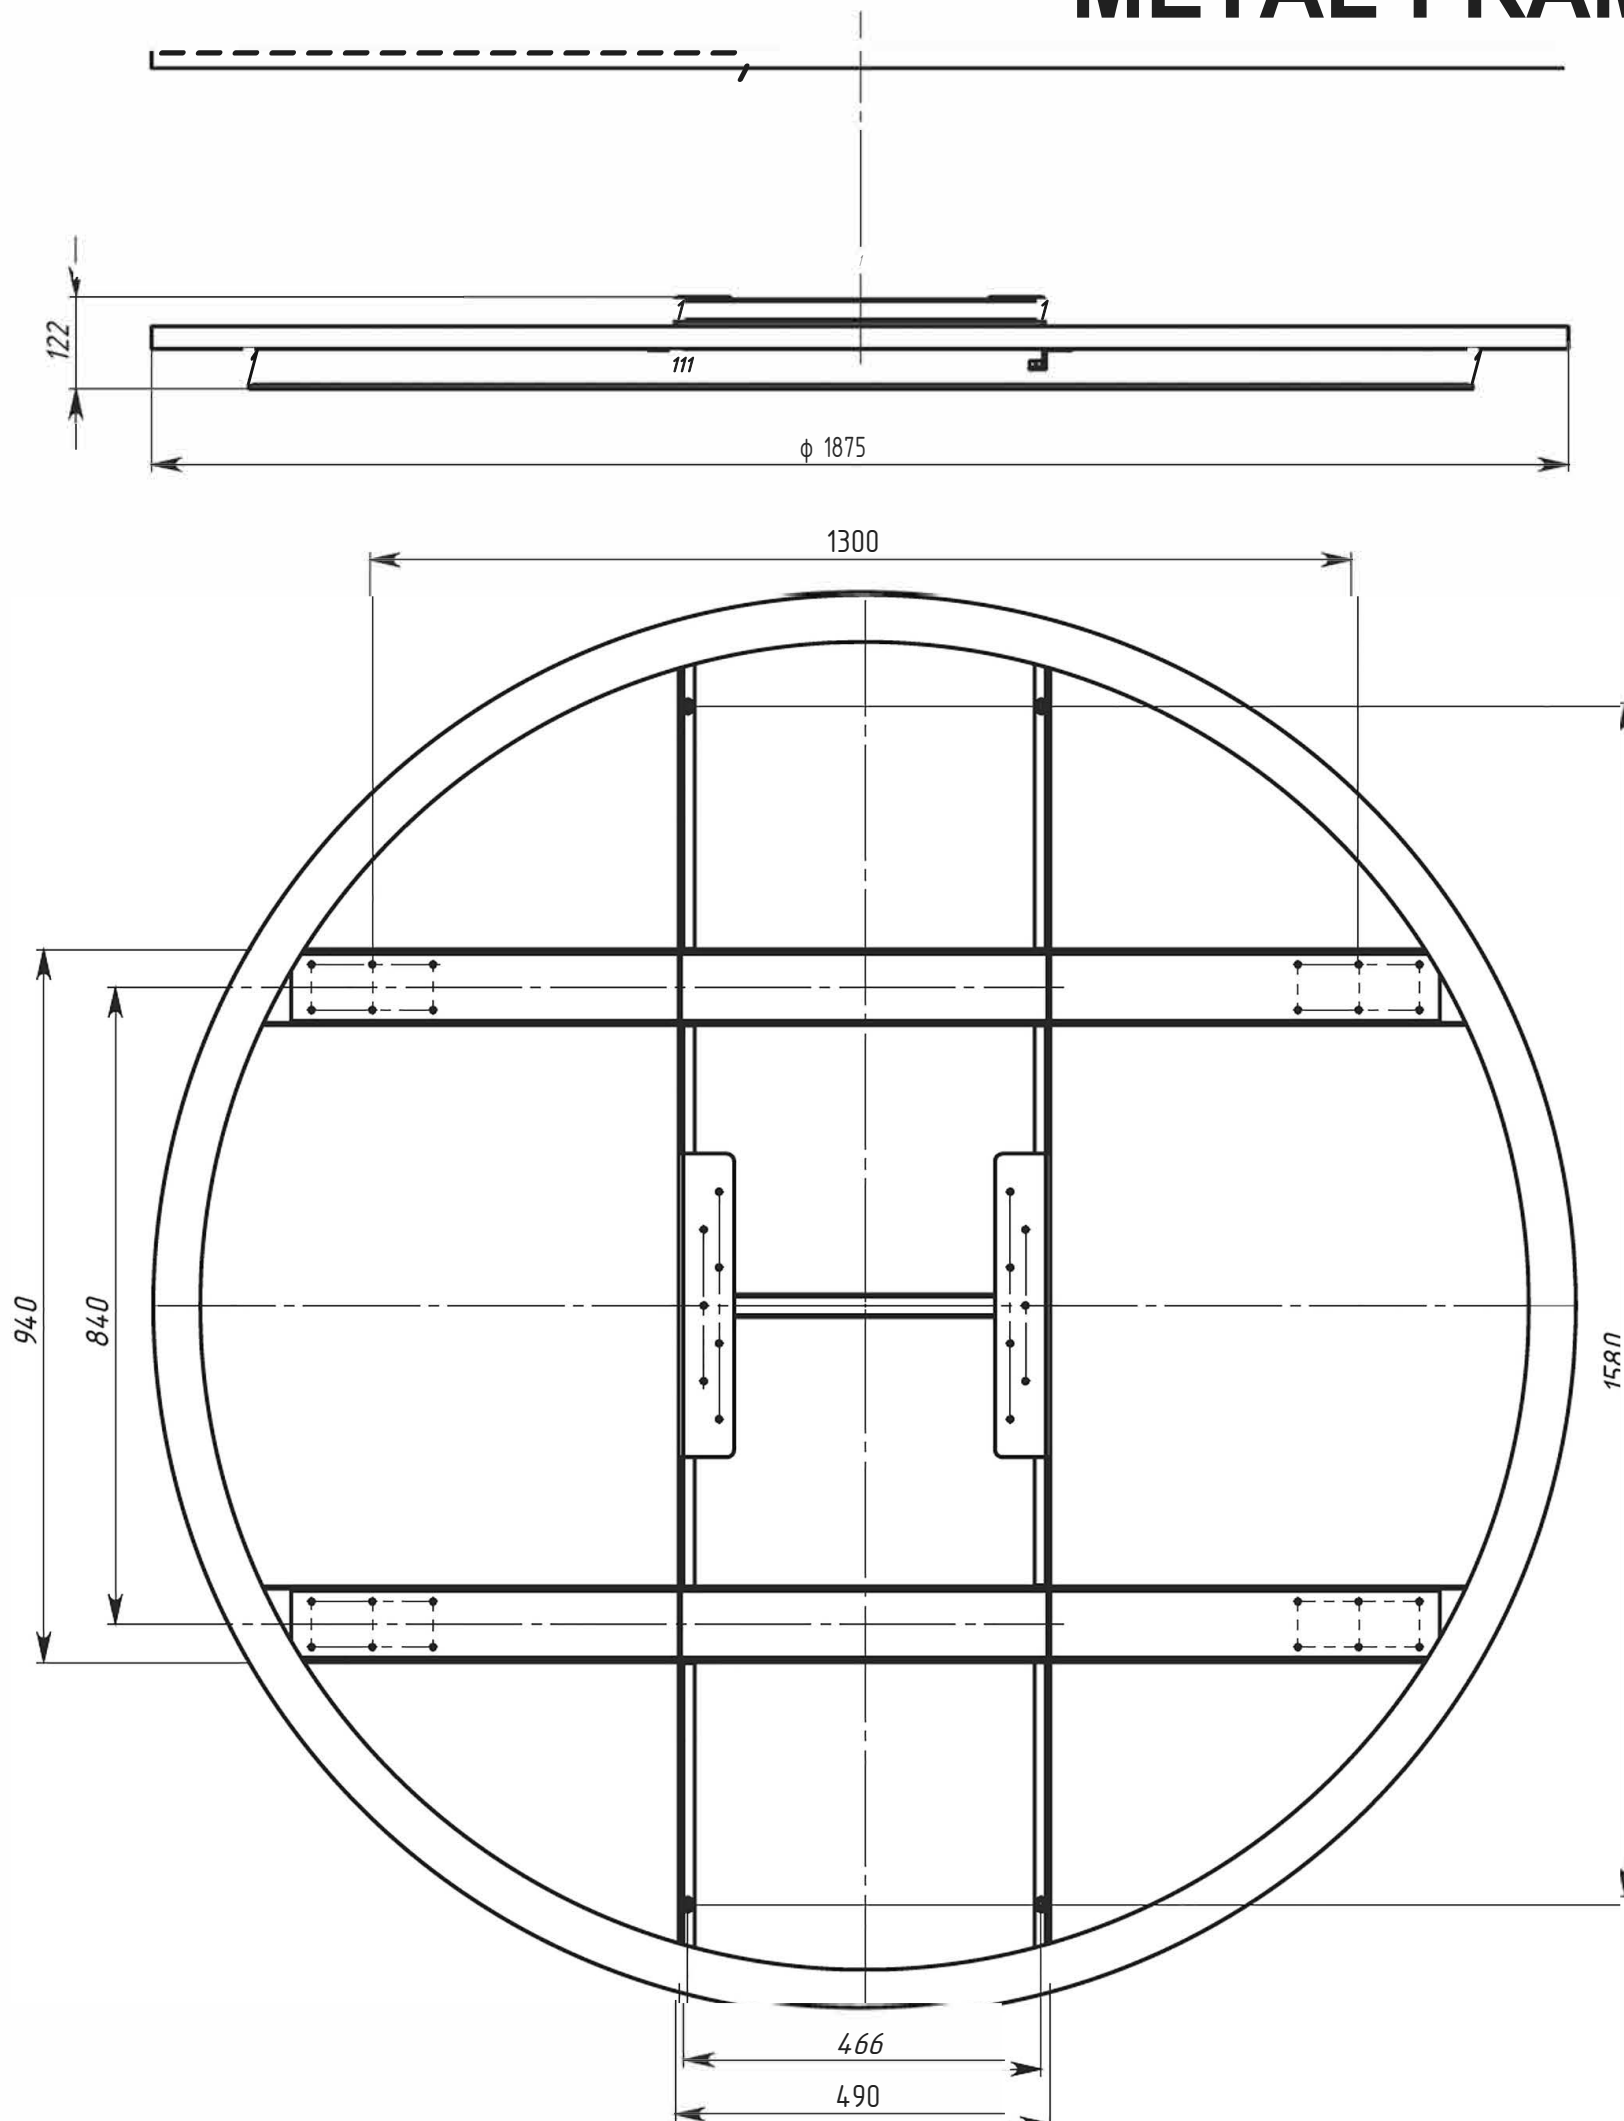

# EXTERNAL STOVE 40 kW

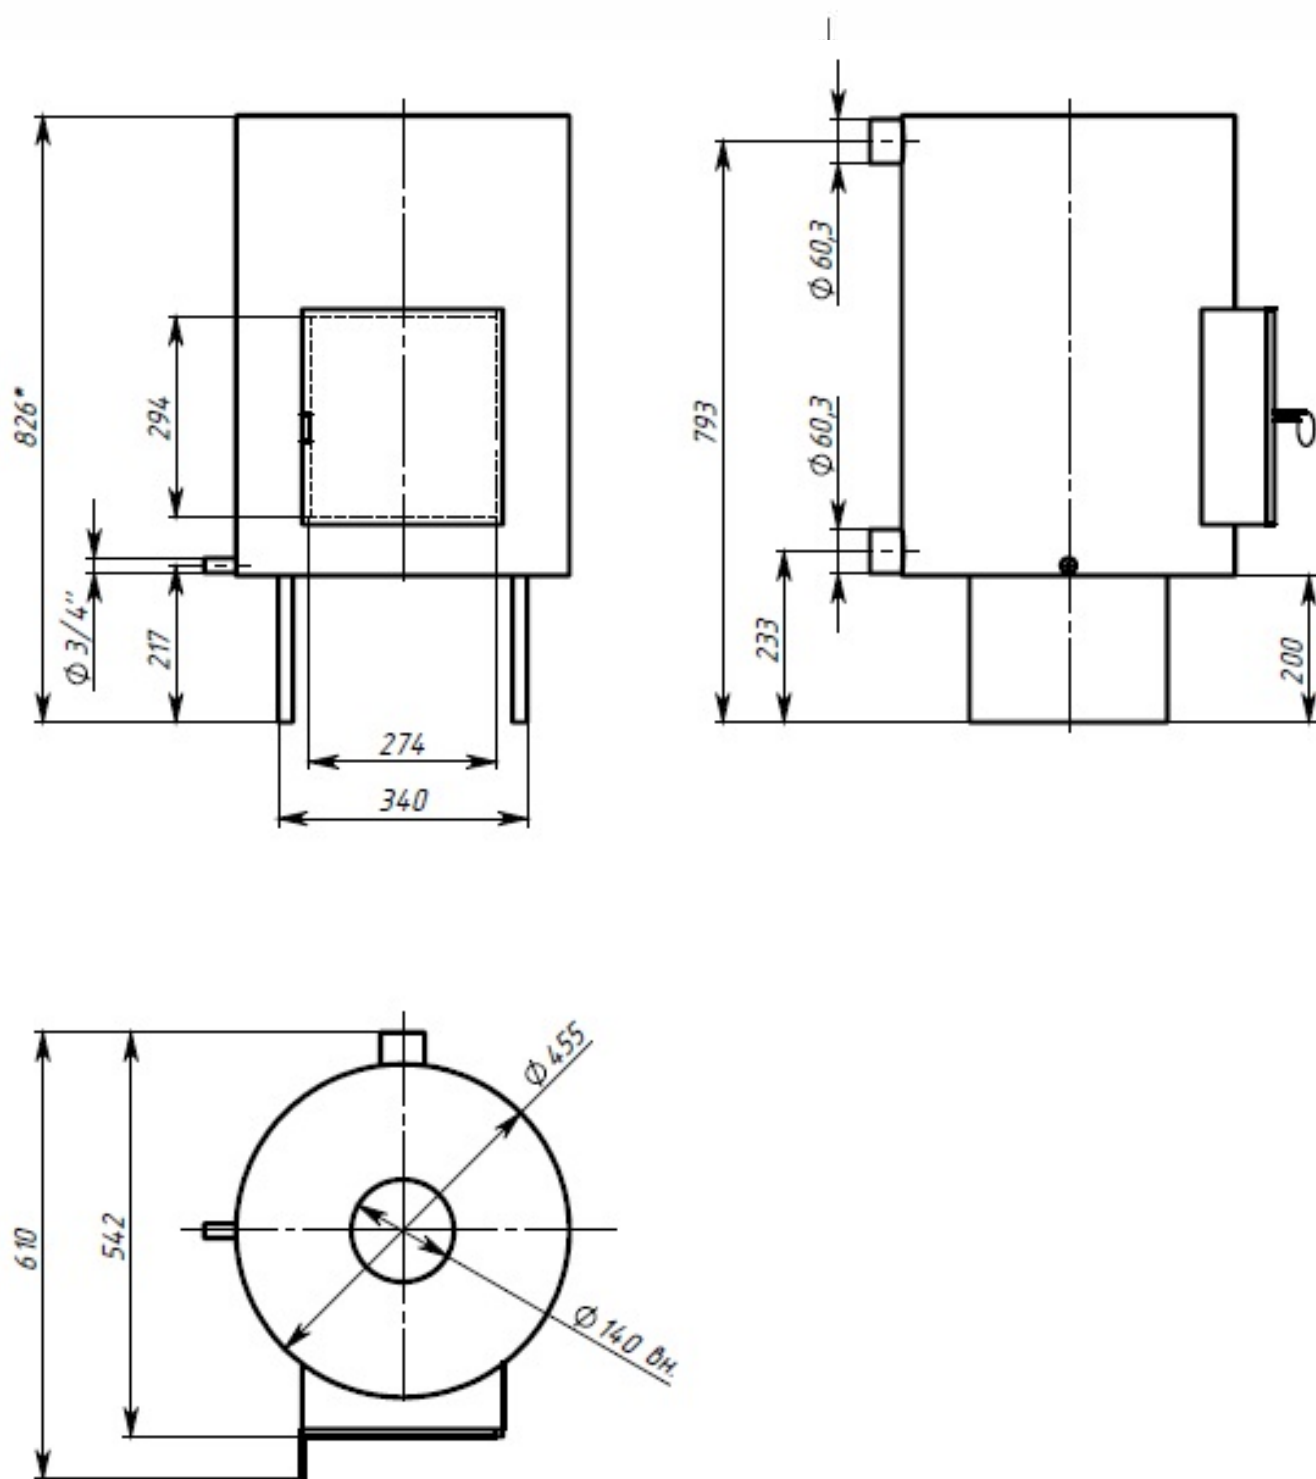

# EXTERNAL STOVE 40 kW WITH CHIMNEY



Cap  
200mm x 150mm

Chimney  
140mm x 1000mm (2 pcs.)

Thermal protection  
200mm x 1000mm

External stove  
diameter 455mm, 826mm


Total height of the chimney with  
stove 2850 mm

# Staircase for hot tub, thermo pine (light)



Width: 470 mm  
Length: 540 mm  
Height: 700 mm


• / - - - - - /



|               |     |
|---------------|-----|
| For 1 support | 450 |
|---------------|-----|

1. \*Dimensions for reference.

# Foundation plan for installing COMFORT 195 HOT TUB WITH EXTERNAL STOVE 40 kW (support surfaces)

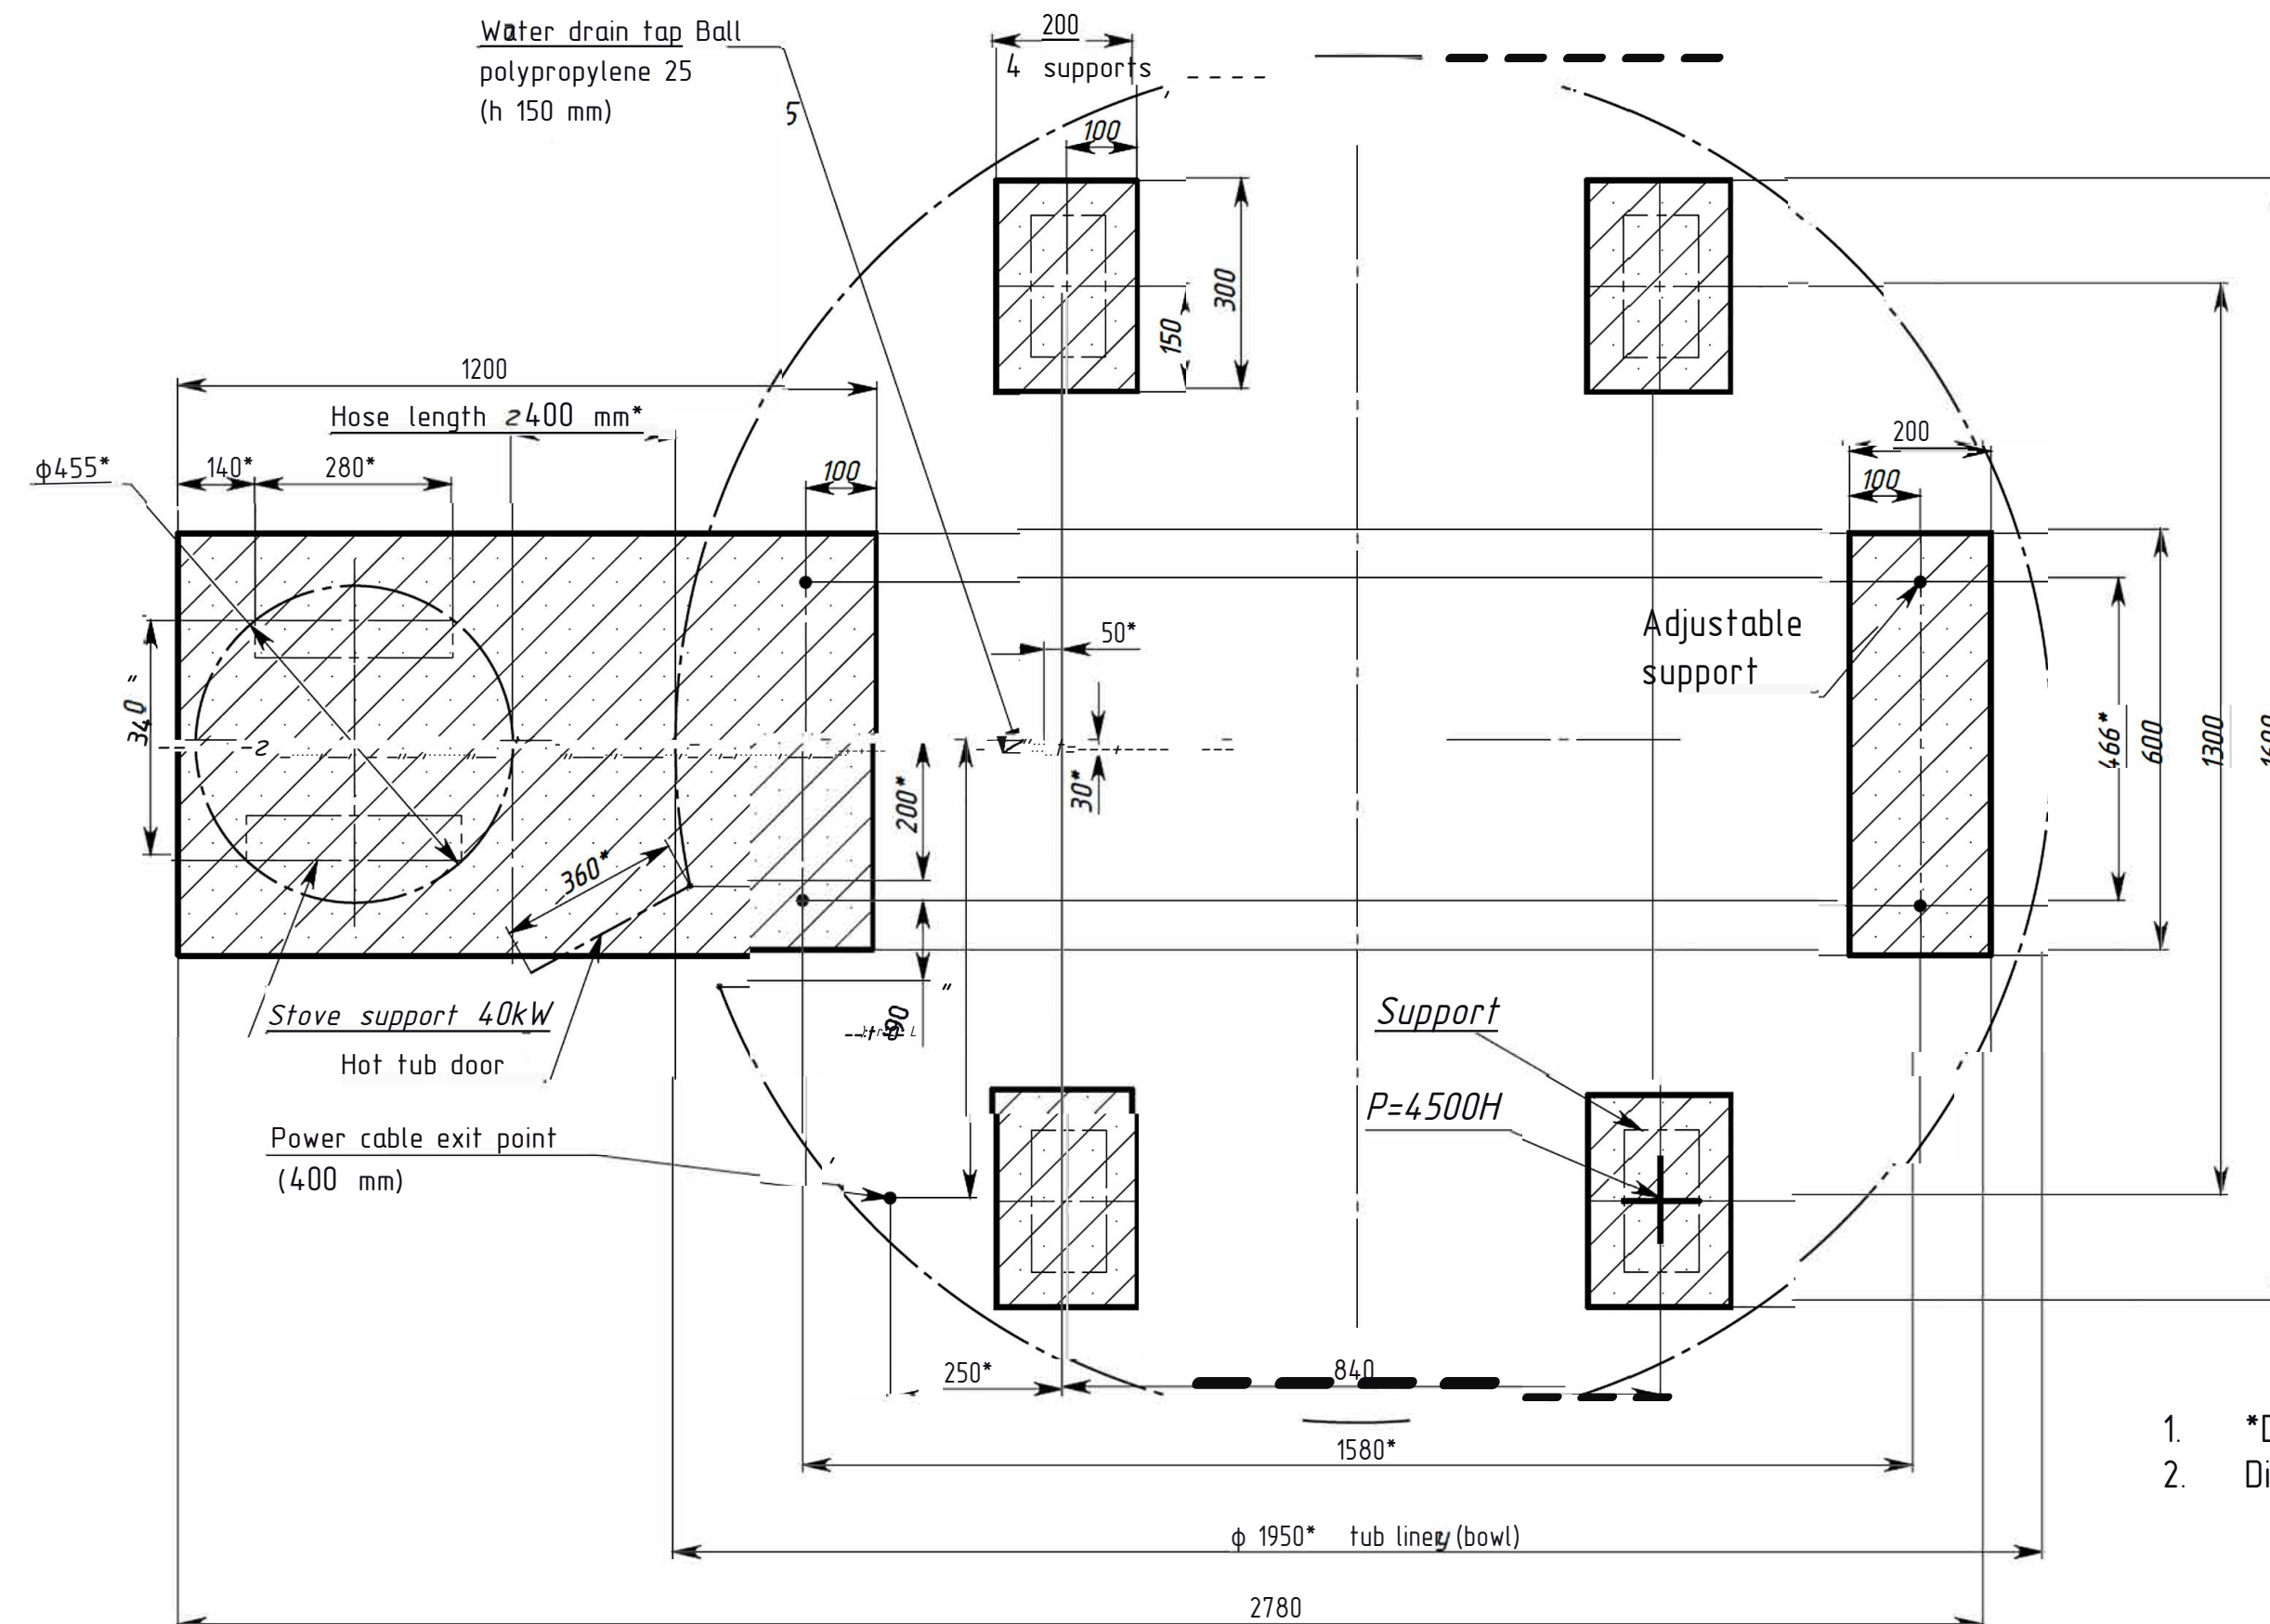

| Support load  | Weight, kg |
|---------------|------------|
| Tub           | 200        |
| Water         | 1200       |
| People        | 400        |
| General       | 1800       |
| For 1 support | 450        |

- \*Dimensions for reference.
- Diameter of the drain hole is 37 mm.